



Compact splicing connector; 5-conductor terminal block; with operating levers; max. continuous service temperature 85°C

Item No.: 222-415



Compact splicing connector; 5-conductor terminal block; with operating levers; max. continuous service temperature 85°C

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	222-415
GTIN / EAN	4044918464956
Content	1
Order amount	40
Customer item number	

Notes

Technical data


Miscellaneous

Safety information 1	In grounded power lines
Rated voltage (II / 2) [V]	400 [V]
Rated impulse voltage (II / 2) [kV]	4 [kV]
Rated current [A]	32 [A]
Legend (ratings)	(II / 2) Overvoltage category II / Pollution degree 2

Technical data	
Connection technology	CAGE CLAMP®
Actuation type	Operating lever
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 Inch
Total number of connection points	5
Total number of potentials	1
Type of wiring	Side-entry wiring
Width	26.6 mm / 1.047 Inch
Height	14.5 mm / 0.571 Inch
Depth	20.5 mm / 0.807 Inch
Color	gray
Flammability class per UL94	V2
Fire load [MJ]	0.13 [MJ]
Weight [g]	6.581 [g]
Ambient temperature (operation)	40 °C
Continuous operating temperature up to [°C]	85 [°C]
Packaging type	BOX
Main product function	Lever terminal block
Product type	Splicing connectors

Images & drawings



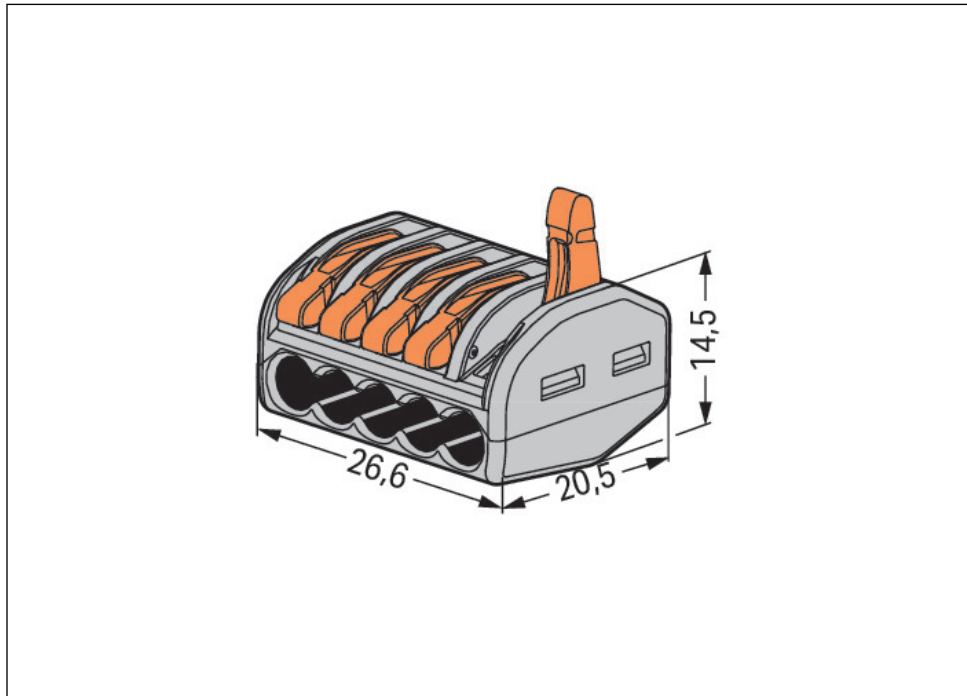

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.