



2-conductor lighting connector; Standard version; Continuous service temperature 105°C

Item No.: 224-112



2-conductor lighting connector; Standard version; Continuous service temperature 105°C

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	224-112
GTIN / EAN	4044918583596
Content	1
Order amount	100
Customer item number	

Notes

Technical data

Miscellaneous


Safety information 1	In grounded power lines
Rated voltage (II / 2) [V]	400 [V]
Rated impulse voltage (II / 2) [kV]	4 [kV]
Rated current [A]	24 [A]
Legend (ratings)	(II / 2) Overvoltage category II / Pollution degree 2
Connection type (1)	Installation side:

Technical data	
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	1 ... 2.5 mm² / 14 ... 12 AWG
Strip length	9 ... 11 mm / 0.35 ... 0.43 Inch
Connection type (2)	Lighting side:
Connection technology 2	CAGE CLAMP®
Number of connection points (connection type 2)	1
Solid conductor (2)	0.5 ... 2.5 mm² / 20 ... 16 AWG
Fine-stranded conductor (2)	0.5 ... 2.5 mm² / 20 ... 16 AWG
Total number of connection points	3
Total number of potentials	1
Type of wiring	Side-entry wiring
Width	9.5 mm / 0.374 Inch
Height	15.5 mm / 0.61 Inch
Depth	20.5 mm / 0.807 Inch
Color	white
Fire load [MJ]	0.046 [MJ]
Weight [g]	2.066 [g]
Continuous operating temperature up to [°C]	105 [°C]
Packaging type	BOX
Main product function	Lighting connector
Product type	Splicing connectors

Images & drawings





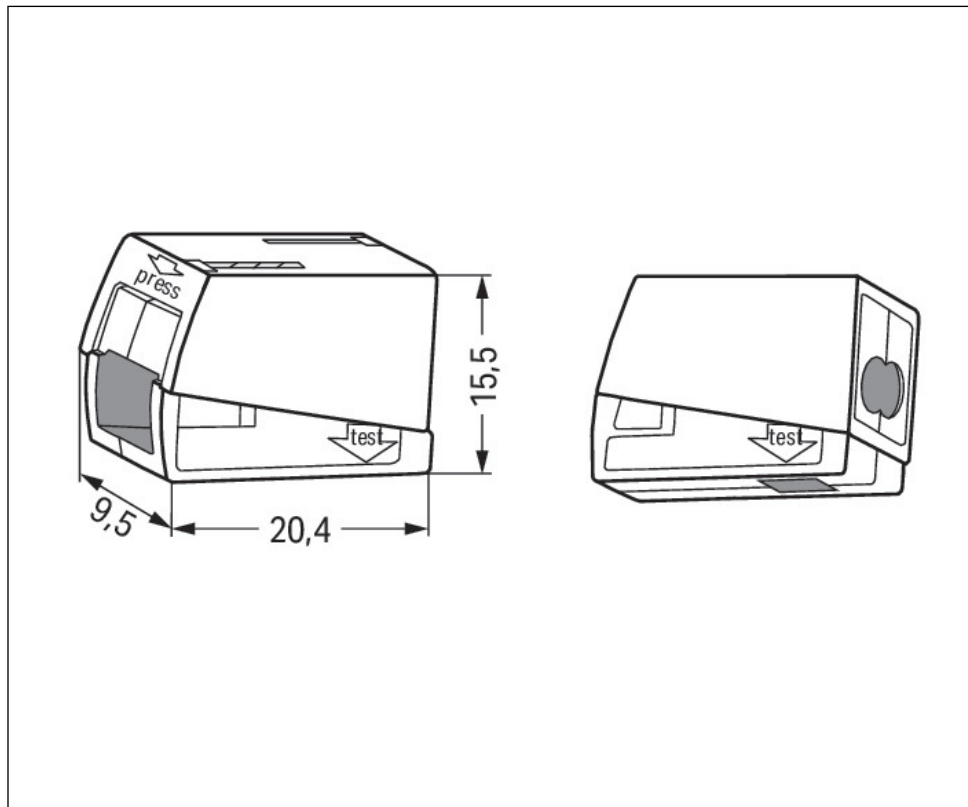

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.