


PLC – PFC100 Controller

PFC100 CS 2ETH ECO

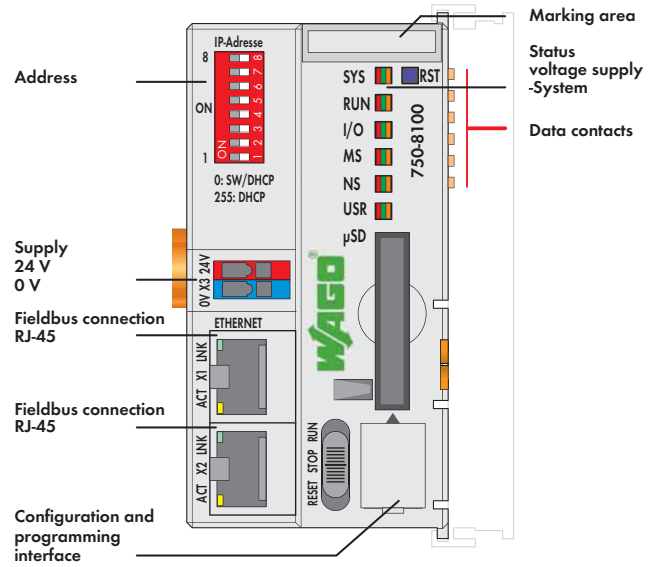

The PFC100 Controller is a compact PLC for the modular WAGO I/O-SYSTEM. In addition to providing commonly used network and fieldbus interfaces, the controller supports all digital, analog and specialty I/O modules in the 750/753 Series.

Two ETHERNET interfaces and an integrated switch enable line topology wiring – no extra-cost hardware is needed.


An integrated Webserver provides user configuration options and displays PFC100 status information.

Besides the processing industry and building automation, typical applications for the PFC100 include standard machinery and equipment control (e.g., packaging, bottling and manufacturing systems, as well as textile, metal and wood processing machines).

The DIP switch configures the last byte of the IP address and may be used for IP address assignment.

The controller's programming complies with IEC 61131-3.

- Programmable via e!COCKPIT
- Direct connection of WAGO I/O modules
- 2 x ETHERNET (configurable)
- Linux 3.18 operating system with RT-Preemption patch
- Configuration via e!COCKPIT or Web-Based Management user interface
- Maintenance-free

Description	Item No.	Pack. Unit
PFC100 CS 2ETH ECO	750-8100	1
<b>Accessories</b>		
microSD memory card, 2 GB	758-879/000-3102	1
Miniature WSB Quick marking system		
 plain	248-501	50
with marking	see Full Line Catalog Automation Technology	
<b>Approvals</b>		
Conformity marking	CE	
Marine applications	DNV GL	
UL 508	pending	
TÜV 14 ATEX 148929 X	pending	
IECEx TUN 14.0035 X	pending	

System Data	
CPU	Cortex A8, 600 MHz
Operating system	Real-time Linux 3.18 (with RT-Preemption patch)
Retain memory	64 Kbytes
ETHERNET	2 x RJ-45 (configurable)
Transmission medium	Twisted Pair S-UTP
	100 Ω, Cat 5;
	Max. line length: 100 m
Baud rate	10/100 Mbit/s; 10Base-T/100Base-TX
Protocols	DHCP, DNS, NTP, FTP, FTPS, SNMP, HTTP, HTTPS, SSH, MODBUS (TCP, UDP)
Programming	e!COCKPIT
IEC 61131-3	IL, LD, FBD (CFC), ST, FC
SD card slot	Push-push mechanism, sealable cover lid
Type of memory card	microSD up to 32 GB (All guaranteed properties are only valid when used with WAGO's 758-879/000-3102 memory card.)

