




Solid state relay; Input: 24 V AC/DC; Output: 12 - 275 VAC / 2 A; Zero voltage switch

Item No.: 788-721



Solid state relay; Input: 24 V AC/DC; Output: 12 - 275 VAC / 2 A; Zero voltage switch

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	788-721
GTIN / EAN	4045454945961
Content	1
Order amount	1
Customer item number	

Notes

*Note:*Note: A separator plate (e.g., 209-191) must be used for voltages greater than 250 V between adjacent relay modules and for compliance with the reinforced insulation requirements.



Technical data


Miscellaneous

Packaging type	BOX
Type of wiring	Front-entry wiring
Color	gray
Weight [g]	49.387 [g]

Technical data	
Pollution degree	2
Nominal input current I_N	10 mA
Output voltage range	12 ... 275 VAC (50/60 Hz)
Drop-out time	10 ms
Limiting Continuous Current [A]	4 [A]
Circuit type	Zero voltage switch
Dielectric strength, control/load circuit (AC, 1 min) [kV<su	4 [kVrms]
Reverse voltage transistor/triac [V]	600 [V]
Nominal input voltage (AC) [V]	24 [V]
Nominal input voltage (DC) [V]	24 [V]
Nominal input voltage U_N	24 V AC/DC
Input voltage range (low level)	0 ... 2.5 V AC/DC
Input voltage range (high level)	15 ... 30 V AC/DC
Switching voltage (max.) AC [V]	275 [V]
Max. voltage drop at output	< 1.1 VAC
Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 Inch
Width	15 mm / 0.591 Inch
Height from upper-edge of DIN-35 rail	53 mm / 2.087 Inch
Depth	86 mm / 3.386 Inch
Type of mounting	Carrier rail 35 x 7.5
Total number of connection points	4

Images & drawings

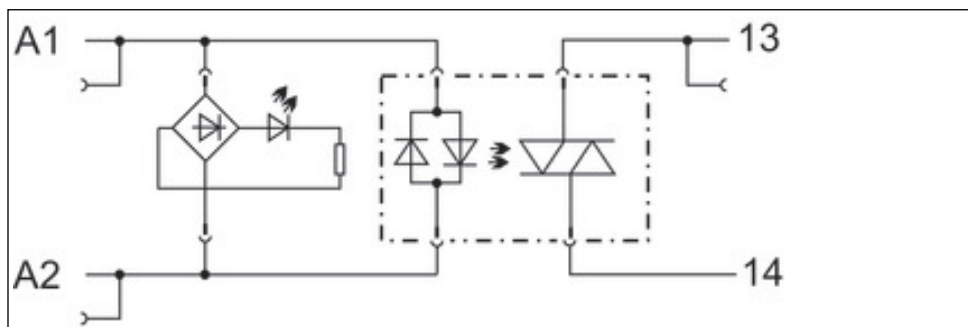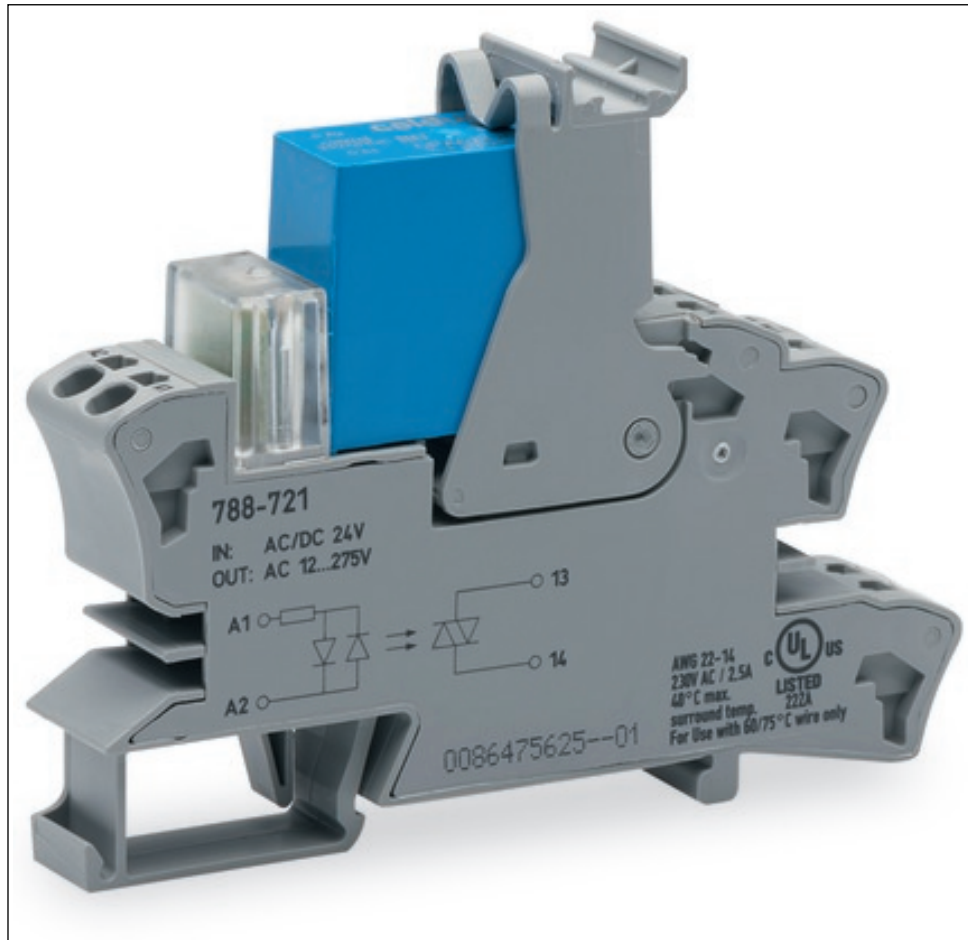

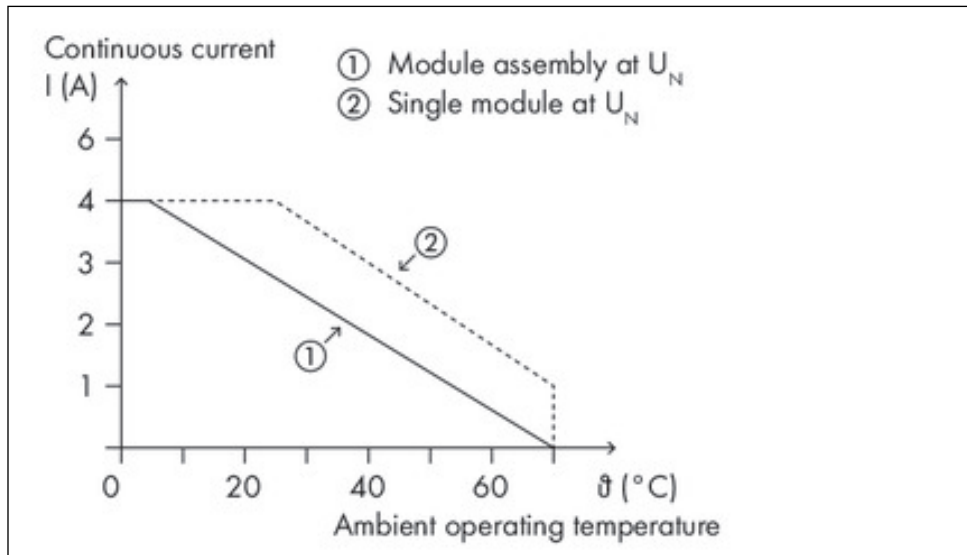

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.