


3D PDF DATASHEET



Create Your Individual 3D PDF Datasheet



Learn How to Create Your Mechanical Product Catalog



Learn How to Create Your BIM Product Catalog



Reduce Your Costs in Engineering and Purchasing



ACS380-040S-01A8-4Architecture300IP20

380, 400, 415, 440, 460 or 480 V

3D View

To activate the interactive 3D view, you must trust this document (see hint on the top) in Adobe Acrobat and click on the question mark.



Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.



Pan


Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.



Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.

3D PDF DATASHEET



Create Your Individual 3D PDF Datasheet



Learn How to Create Your Mechanical Product Catalog



Learn How to Create Your BIM Product Catalog




Reduce Your Costs in Engineering and Purchasing




ACS380-040S-01A8-4Architecture300IP20

380, 400, 415, 440, 460 or 480 V

2D derivation

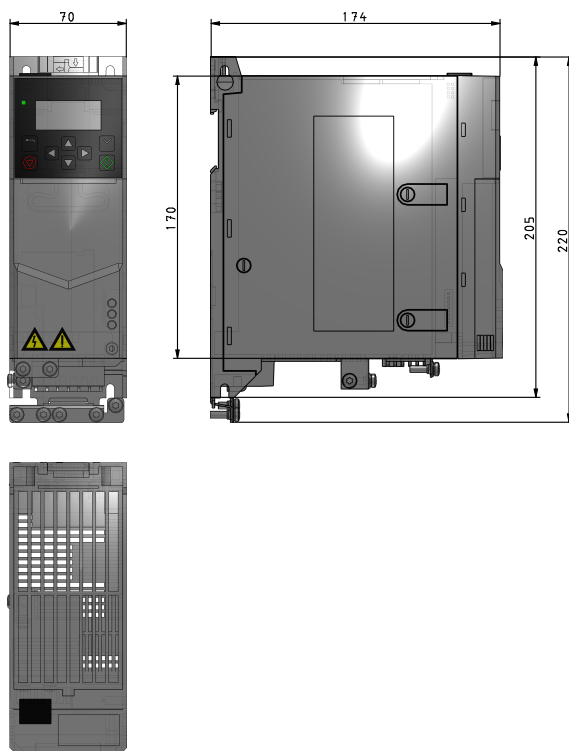

ISO View

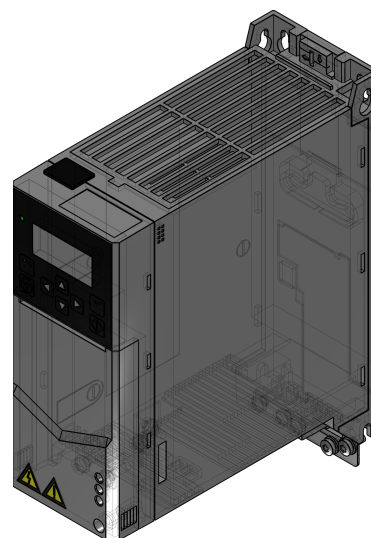

3D PDF DATASHEET

Create Your Individual 3D PDF Datasheet



eCATALOGsolutions

Learn How to Create Your Mechanical Product Catalog



BIM catalogs.net

Learn How to Create Your BIM Product Catalog



PARTsolutions




Reduce Your Costs in Engineering and Purchasing



ACS380-040S-01A8-4Architecture300IP20

380, 400, 415, 440, 460 or 480 V

Technical drawings

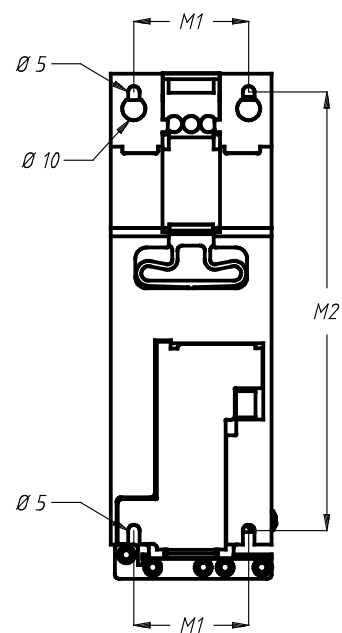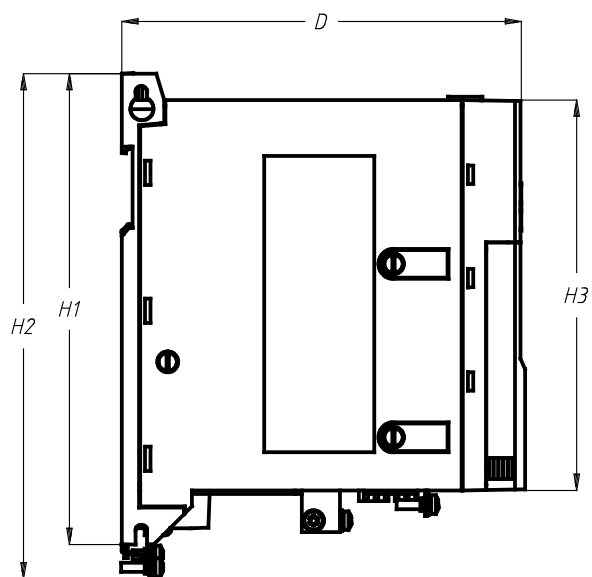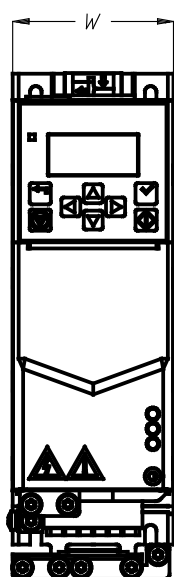


3D PDF DATASHEET

Create Your Individual 3D PDF Datasheet



Learn How to Create Your Mechanical Product Catalog



Learn How to Create Your BIM Product Catalog



Reduce Your Costs in Engineering and Purchasing



ACS380-040S-01A8-4Architecture300IP20

380, 400, 415, 440, 460 or 480 V

Technical Data

TC (Type Code)	ACS380-040S-01A8-4
TYPE (Drive Type)	IP20
DOP (Drive Options)	Type 0
CONSTRUCTION (Construction)	Standard Drive
PHDHP (Power Heavy-duty use (150% overload for 1 min) / HP)	0.5
PHDKW (Power Heavy-duty use (150% overload for 1 min) / kW)	0.37
IHD (Current Heavy-duty use (150% overload for 1 min) / A)	1.1
IMAX (Maximum output current / A)	2.0
PLDHP (Power Light Duty (110% overload for 1 min) / HP)	0.75
PLDKW (Power Light Duty (110% overload for 1 min) / kW)	0.55
ILD (Current Light Duty (110% overload for 1 min) / A)	1.6
PNHP (Power Nominal ratings - No overload / HP)	0.75
PNKW (Power Nominal ratings - No overload / kW)	0.55
IN (Current Nominal ratings - No overload / A)	1.6
FS (Frame Size)	R0
LODDEST (LOD Destination)	Architecture
LODLEVEL (LOD Level)	300
H1 (Height (H1) / mm)	205
H2 (Height (H2) / mm)	220
H3 (Height (H3) / mm)	170
W (Width / mm)	70
D (Depth / mm)	174
M1 (M1 / mm)	50
M2 (M2 / mm)	191
WEIGHT (Weight / kg)	1.4
SIZE (Size)	01A8
OPTIONS (Option Codes)	N/A

3D PDF DATASHEET



 **eCATALOG**solutions



 **BIM** catalogs.net



 **PART**solutions



Create Your Individual 3D PDF
Datasheet



Learn How to Create Your
Mechanical Product Catalog



Learn How to Create Your BIM
Product Catalog



Reduce Your Costs in
Engineering and Purchasing



ACS380-040S-01A8-4Architecture300IP20

380, 400, 415, 440, 460 or 480 V

Bill of Materials

N°	Description	Amount
1	ACS380-040S-01A8-4Architecture300IP20	1