

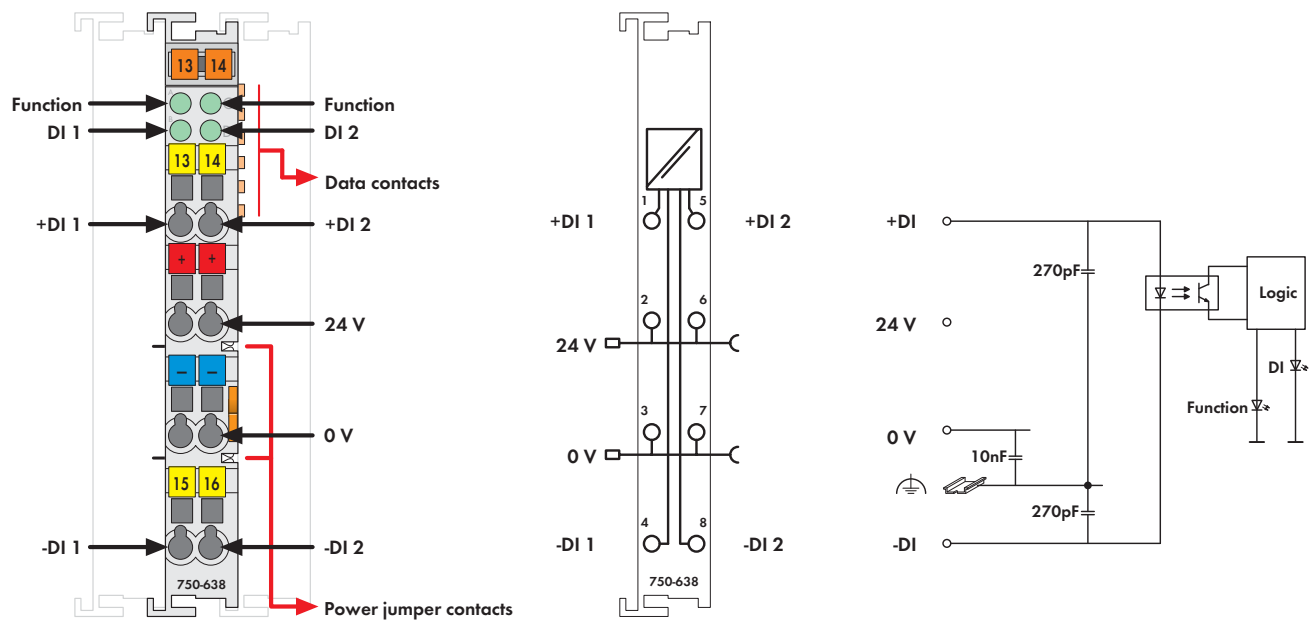


Fig. 750 Series
Delivered without miniature WSB markers

The I/O module has two counters that count 24VDC binary pulses independently of one another. The data is then transmitted to the control via the fieldbus.

The counters can be set or reset with the control bytes. A counter lock-out is also possible.

The control bytes also determine the direction of counting.

Description	Item No.	Pack. Unit
2-Channel Up/Down Counter, 500 Hz	750-638	1
2-Channel Up/Down Counter, 500 Hz/T	750-638/025-000	1
Extended temperature range: -20 °C ... +60 °C		
2-Channel Up / Down Counter, 500 Hz	753-638	1
(without connector)		
Accessories	Item No.	Pack. Unit
 753 Series Connectors	753-110	25
 Coding elements	753-150	100
Miniature WSB Quick marking system		
 plain	248-501	5
with marking	see Section 1.1	
Approvals		
Conformity marking	CE	
Korea Certification		
 UL 508		
 ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
TÜV 12.1297 X (Brazil)	Ex nA IIC T4 Gc (750-638)	
 TÜV 07 ATEX 554086 X	I M2 Ex d I Mb, II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIIC T135°C Dc	
IECEx TUN 09.0001 X	Ex d I Mb, Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc	