


Data Sheet | Item Number: 789-665

Ground resistance signaling module; Ground fault alarm via digital output; Supply voltage: 24 VDC; Module width: 18 mm


<https://www.wago.com/789-665>



X1.1			X2.1
X1.2			
X1.3	+24 V	$U_S$	0 V
			X2.2

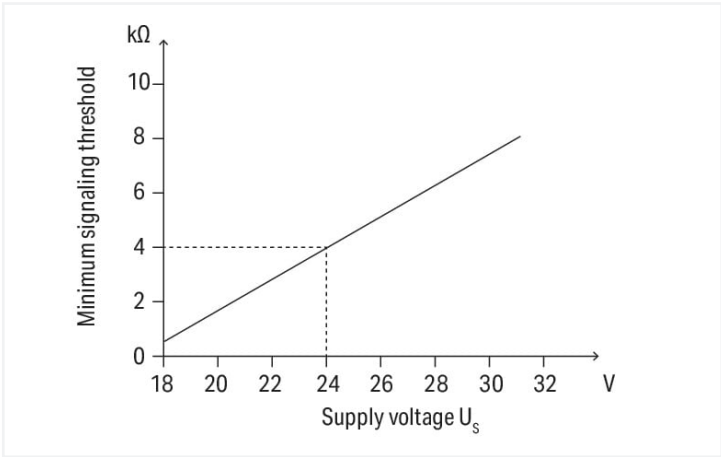

Signaling threshold

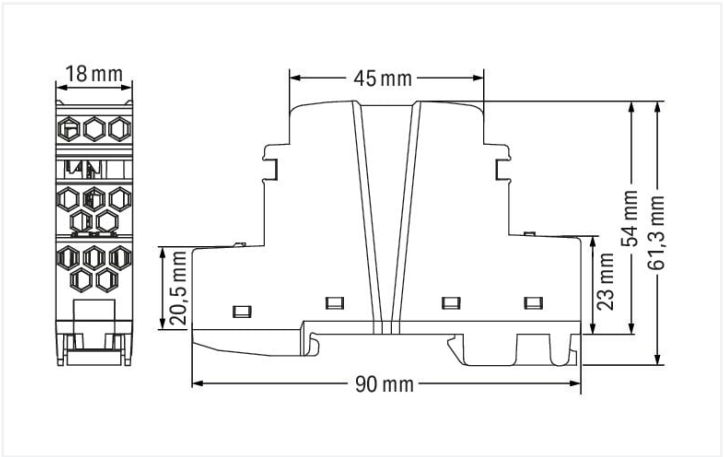

Short description:

WAGO's module signals a value falling below a non-adjustable, asymmetric isolation resistance between +24 V or 0 V of the supply voltage and ground with a potential-free (Iso OK) contact and status LED. The Iso OK contact can be evaluated via a PLC. This status is maintained until the next measurement interval.

Operation with Grounded Control Circuit (Functional Potential Equalization)

- The module establishes an internal connection between the 0 V (X2.2) and ground (X2.1) connections via a semiconductor switch.
- At 10 s intervals, this connection between 0 V and ground is interrupted for 0.5 s, and the isolation resistance between +24 V (X1.3) or 0 V (X2.2) of the supply voltage and earth (X2.1) is determined.
- The grounding connection on the module does not meet the requirements of a protective earth terminal (PE). It serves as a functional ground. The measurement method does not involve the module establishing any permanent connection between 0 V and ground.

Operation with Ungrounded Control Circuit

- In this operating mode, the semiconductor switch to establish a connection between 0 V (X2.2) and ground (X2.1) is deactivated. At 1 s intervals, the isolation resistance offset is determined for 0.5 s.
- The module does not meet the requirements of an isolation monitoring device per EN 61557-8.

"Iso OK" Contact

- The potential-free contact serves the purpose of supporting evaluation (e.g., via a PLC) of looming isolation faults.
- This contact must not be used to switch safety-related products that could cause the circuit to switch off.



Power supply		
Nominal supply voltage $U_s$		DC 24 V (SELV)
Supply voltage range (DC)		DC 18 ... 31.2 V
Current consumption at nominal supply voltage		$\leq 40$ mA
Power loss $P_l$		$\leq 1.7$ W
Current at ground fault (24 VDC) max.		56 mA

Signaling		
Operation status indicator		1 x LED "Status OK" (green)
Signaling		1 x LED "Iso Alarm" (red) 1 x LED "Iso Alarm" 24 V – Ground (yellow) 1 x LED "Iso Alarm" 0 V – Ground (yellow) 1 x Signal output "Iso OK"

Iso OK contact		
Switching voltage (max.)		48 VDC (SELV)
Continuous current (max.)		500 mA (for general use)
Number of Iso OK contacts connected in series (max.)		25 (Limit value type: 1); 32 (Limit value type: 2 and 3) (per IEC 61131)
Function		1 make contact (NO); closed with applied power supply and insulation resistance > limit value

Circuit protection		
Backup fusing (required)		The fuse must be placed in the output circuit of the power supply. The fuse must be adapted to the power supply used and must trip safely in case of a short circuit. The module is designed for use with a 10 A (max. ) fuse or with a 10 ADC (max.) circuit breaker (characteristic B or C).

Safety and protection		
Pollution degree		2
Overvoltage category		II
Protection type		IP20
Test voltage (supply/Iso OK contact)		1.5 kVAC; 50 ... 60 Hz; 1 min
MTBF		> 600,000 h (per MIL-HDBK-217F2)

Mode: Ungrounded circuit		
Response value for alarm at nominal voltage		4 k $\Omega$ (at $U_s = 24$ V; for other $U_s$ values, see diagram for signaling threshold)
Response time		1 s
Hysteresis (typ.)		1 k $\Omega$

Mode: Grounded circuit		
Response value for alarm at nominal voltage		4 k $\Omega$ (at $U_s = 24$ V; for other $U_s$ values, see diagram for signaling threshold)
Response time		10 s
Hysteresis (typ.)		1 k $\Omega$



Connection data		
Connection type 1		X1.x
Connection technology		Push-in CAGE CLAMP®
WAGO connector		picoMAX® eCOM
Solid conductor		0.25 ... 1.5 mm² / 24 ... 14 AWG
Fine-stranded conductor		0.25 ... 1.5 mm² / 24 ... 14 AWG
Fine-stranded conductor; with insulated ferrule		0.25 ... 0.75 mm²
Fine-stranded conductor; with uninsulated ferrule		0.25 ... 1.5 mm²
Strip length		8 ... 9 mm / 0.31 ... 0.35 inches
Connection type 2		X2.x
Connection technology 2		Push-in CAGE CLAMP®
WAGO connector 2		picoMAX® eCOM
Solid conductor 2		0.2 ... 2.5 mm² / 24 ... 12 AWG
Fine-stranded conductor 2		0.2 ... 2.5 mm² / 24 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2		0.25 ... 1.5 mm²
Fine-stranded conductor; with uninsulated ferrule 2		0.25 ... 2.5 mm²
Strip length 2		9 ... 10 mm / 0.35 ... 0.39 inches

Physical data		
Width		18 mm / 0.71 inches
Height		90 mm / 3.54 inches
Depth from upper-edge of DIN-rail		51 mm / 2.01 inches

Mechanical data		
Mounting type		DIN-35 rail

Material data		
Fire load		0 MJ
Weight		47 g

Environmental requirements		
Ambient temperature (operation)		-40 ... +70 °C
Ambient temperature (storage)		-40 ... +85 °C
Temperature range of connection cable		≥ (T <sub>ambient</sub> + 10 K)
Relative humidity		5 ... 95 % (non-condensing)
Operating altitude (max.)		3000 m


Standards and specifications		
Conformity marking		CE
EMC immunity to interference		EN 61000-6-2
EMC emission of interference		EN 61000-6-3; EN 61000-6-4
Standards/specifications		UL 61010-2-201





Commercial data	
ETIM 8.0	EC003596
ETIM 7.0	EC003596
PU (SPU)	1 pcs
Country of origin	CN
GTIN	4066966120820
Customs tariff number	85365005000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 020/2011	EAC_Certificate_RU_C- DE.AM02.B.00115_19
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 61010-2-201	E175199

Approvals for hazardous areas		
		
Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	UL 121201	E198726

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 789-665	

Documentation



Bid Text		
789-665	xml 10.14 KB	<a href="#">↓</a>
789-665	docx 28.75 KB	<a href="#">↓</a>


Instruction Leaflet			
Erdwiderstand-Signali sierungsmodul	V 1.0.0 17.11.2020	pdf 2624.60 KB	<a href="#">↓</a>


CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 789-665 <a href="#">↓</a>	EPLAN Data Portal 789-665 <a href="#">↓</a>
	ZUKEN Portal 789-665 <a href="#">↓</a>

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marker carrier



[Item No.: 2009-198](#)  
Adaptor; gray

1.1.1.2 Marking strip

<a href="#">Item No.: 2009-110</a> Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.2 Tool
1.1.2.1 Operating tool

<a href="#">Item No.: 210-719</a> Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft