

S5-5-G8-62-SG-ST2/ST4 S5-5-F8-92-SG-ST2/ST4 SL5-5-G-82-SG-ST4 SL5-5-F-92-SG-ST4



INSTRUCTION MANUAL

INSTRUCTIONS FOR USE



The emitter/receiver safety sensors are homologated only to be connected to the SG-BWS-T4 safety control units.

Different use is potentially dangerous and not allowed, please take care to follow the instructions of manual Series SG-BWS-T4.

For the connection modalities, please refer to the SG-BWS-T4 instruction manual.

CONTROLS

S5...SG-ST2/ST4

OUTPUT LED (receiver)

The red LED indicates the output status.

STABILITY LED (receiver)

The green LED ON indicates that the received signal has a safety margin greater than 30% compared to the output switching value.

POWER ON LED (emitter)

The green LED indicates that the sensor is operating.

SL5...SG-ST4

OUTPUT LED (receiver)

The yellow LED indicates the output status.


STABILITY LED (receiver)

The green LED ON indicates that the received signal has a safety margin greater than 30% compared to the output switching value.

POWER ON LED (emitter)


The green LED indicates that the sensor is operating.

DIMENSIONS

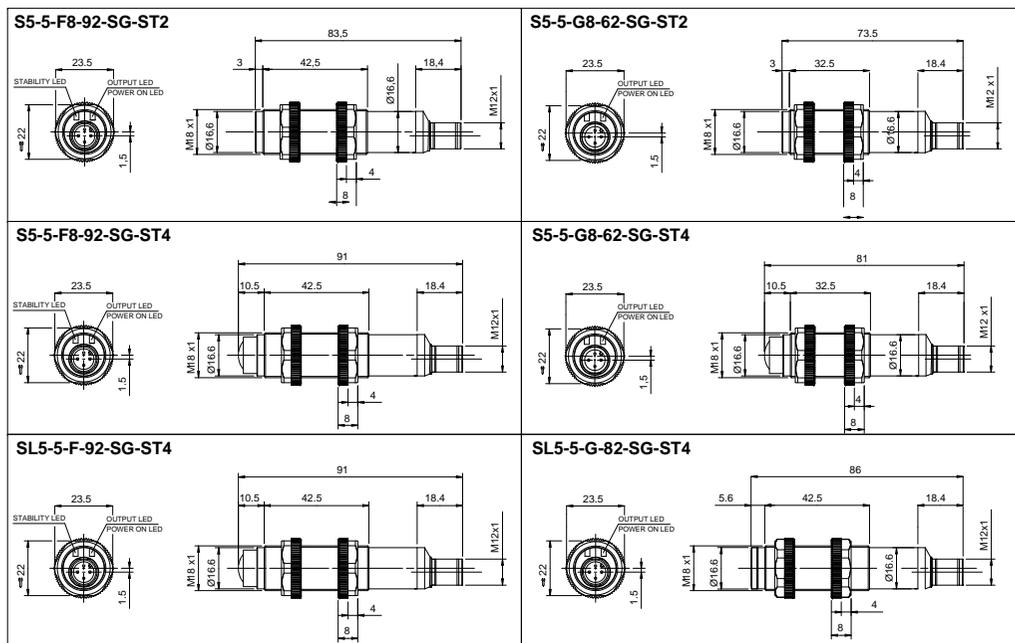


CONNECTIONS

RECEIVER

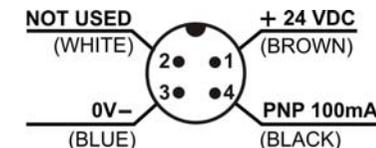

EMITTER

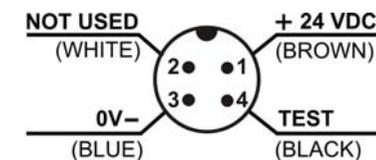

TECHNICAL DATA

	SL5...SG-ST4	S5...SG-ST2/ST4
Power supply:	24 VDC ±15%	
Current consumption (output current excluded):	35 mA max.	30 mA max.
Outputs:	PNP (short-circuit protection)	
Output current:	100 mA max.	
Output saturation voltage:	2 V max.	
Output leakage:	50 µA a 30 VDC	
Response time:	1 ms max.	
Switching frequency:	500 Hz max.	
Operating temperature:	-10 ... 50 °C	-25 ... 55 °C
Storage temperature:	-25 ... 70 °C	
Dielectric strength:	500 Vac / 1 min. between electronic parts and housing	
Insulation resistance:	>20 MΩ / 500 Vdc, between electronic parts and housing	
Operating distance (minimum):	0 ... 40 m	0...8 m
Emission type:	Red laser (650 nm) Class 1 EN 60825-1 (2014)	Infrared LED 880 nm
EAA:	xx...ST2 = ± 5° / xx...ST4 = ± 2.5°	
Ambient light rejection:	according to EN 60947-5-2	
Vibration:	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)	
Shock resistance:	11 ms (30 G) 6 shock for every axis (EN60068-2-27)	
Housing:	ABS UL 94V-O	
Connector/Gland:	Polycarbonate	
Lenses:	PMMA plastic	
Protection class:	IP67	
Connections:	M12 4-pole connector	
Weight:	30 g. max.	

Datalogic S.r.l.
Via S. Vitalino 13 - 40012 Calderara di Reno - Italy
Tel: +39 051 3147011 - Fax: +39 051 3147205 - www.datalogic.com

Helpful links at www.datalogic.com: **Contact Us, Terms and Conditions, Support.**

The warranty period for this product is 36 months. See General Terms and Conditions of Sales for further details.

Under current Italian and European laws, Datalogic is not obliged to take care of product disposal at the end of its life. Datalogic recommends disposing of the product in compliance with local laws or contacting authorised waste collection centres.

© 2009 - 2017 Datalogic S.p.A. and/or its affiliates • ALL RIGHTS RESERVED. • Without limiting the rights under copyright, no part of this documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means, or for any purpose, without the express written permission of Datalogic S.p.A. and/or its affiliates. Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U. All other trademarks and brands are property of their respective owners. Datalogic reserves the right to make modifications and improvements without prior notification.