


# AUTOMOTIVE

## Solution Guide





# DATALOGIC AT A GLANCE

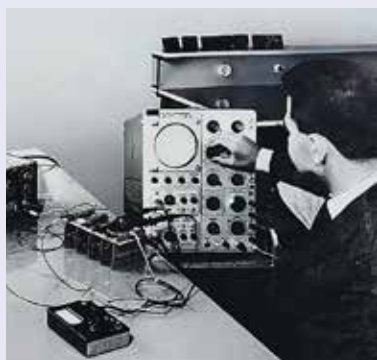

Datalogic began its entrepreneurial adventure in 1972, when **Dr. Romano Volta** started developing and producing optical-electronic control appliances for the packaging, textile and ceramics sectors. Romano Volta sensed the revolutionary scope of the bar code and started developing a manual reader able to read it, combining electronics, mechanics, optics and information technology. In 1974 Datalogic brought this technology into the Retail world, in a supermarket in Troy, Ohio and then applied it to the whole industrial world, giving life to the only true Bar Code Company at a global level.

Today, Datalogic is a global leader in the automatic data capture and process automation markets, specialized in the design and production of bar code readers, mobile computers, sensors for detection, measurement and safety, RFID, vision and laser marking systems. Throughout the entire value chain, Datalogic solutions increase the efficiency and quality for processes in the Retail, Manufacturing, Transportation & Logistics and Healthcare industries.

**45+  
years**  
of experience

**500 engineers**  
in 14 R&D centers in:  
Italy, USA, Vietnam, China,  
and Germany


**1,200  
patents**  
filed and more than  
350 in approval

**3,000+  
Employees**

in 27 countries:  
21% Americas,  
56% EMEA, 23% APAC

**A constant  
growth**

(total revenues  
mln Euros)

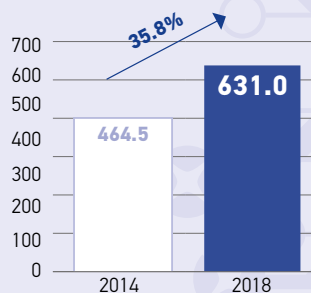

**10%  
Revenues**

invested in  
R&D

**10 Manufacturing and Repair facilities**

in US, Brazil, Hungary, Slovakia, Italy, China, Vietnam and Australia



# WHY DATALOGIC



- ✦ **Unique Player** in both automatic data capture and industrial automation
- ✦ Recognized worldwide **leader**
- ✦ **Global player** expanding in different verticals
- ✦ Leading **innovator**
- ✦ Reliable products for **all needs**
- ✦ Wide range of **customizable service solutions** worldwide



# DATALOGIC FOR INDUSTRY 4.0

“Unique portfolio provider of smart, interconnected devices able to protect, identify, sense, check and mark. We’re focused on Automotive, Electronics, Packaging and General Manufacturing customers in the Industrial Production world”

MANUFACTURING

## TECHNOLOGIES FOR DATA GENERATION...

The technologies used to generate data by Datalogic can be divided into five categories. They depend on the type and function of the product data or production process: marking (Laser Markers), scanning (Bar Code Readers and Vision Systems), writing and reading (Readers and RFID tags), object and physical feature scanning (Photoelectric Sensors, Smart Cameras and Vision Systems).

## ...AND AUTOMATION ENABLING

Datalogic products also detect and locate parts during the manufacturing process enabling robot guidance and full automated processes (Sensors, Smart Cameras and Vision Systems). All this process can be safely automatized thanks to solutions for machine safeguarding and robotic cell protection (Safety Barriers and Laser Scanners).

In all these cases the Datalogic components are perfectly integrated within the systems described by Industry 4.0 through interfaces and standard Industrial Ethernet protocols. In accordance with another Industry 4.0 requirement, Datalogic solutions include smart functions for communication, self-configuration and self diagnostics.





# AUTOMOTIVE SMART MANUFACTURING

## SENSORS ENABLING INDUSTRY 4.0

Driven by Industry 4.0, Automotive production is aiming to highly flexible workflows, maximum productivity and efficiency.

Sensors and Safety devices in a smart factory are the key enabler that will help to realize the biggest benefits of this revolution.

Sensors can provide continuous status updates which can then be compared with a "digital twin" – a simulation of the system that runs at 100% efficiency. Through this, deviations can be quickly flagged and trends can be more easily identified.

Datalogic provides a complete Sensor Portfolio that is perfectly fit to provide these state-of-the-art solutions for detection and inspection on any automated product line.



## AUTOMOTIVE FULL DPM TRACEABILITY

In production and assembly of automotive components, an application of the smart factory is the Laser Marking of 2D Datamatrix bar codes directly onto mechanical parts such as pistons, bearings, gears and other components. Datamatrix codes include all information about the item and production process; there is no need for any additional label or tag.

In this way the mechanical component is able to introduce itself for manufacturing purposes, stating where it comes from, what needs to be done and where it has to go once the process has been completed. This data is read and sent through an integrated Vision System, a Smart Camera or a 2D Bar code Imager. This information can then be used, also in logistics, to store and even manage spare parts.



## MARK&READ COMPLETE SOLUTION

Datalogic presents a full traceability solution for automotive parts.

Datalogic P-Series Smart Cameras locate the position/orientation of a part to drive the Laser Marker accordingly. This guarantees a flexible and effective manufacturing method.

Datalogic Laser Markers (Uniq, Arex) provides a high quality marking solution on every surface.

Datalogic 2D imager Matrix Series will then verify the readability of the bar code, while MX-E machine Vision System are able to detect logos and read text strings like serial numbers. All these devices are integrated and connected by main industrial Ethernet Interfaces to communicate data to the plant ERP and MES.



# DATALOGIC SOLUTIONS FOR AUTOMOTIVE

## SAFETY

Datalogic offers a complete line of **type 2 and type 4 safety light curtains** for point protection and access control in dangerous areas, with basic and advanced functions, such as integrated muting, blanking, and cascade.

**Laser Sentinel**, a new family of safety laser scanners, provides a solution for safe monitoring of a two-dimensional area with high level detection performances in compact dimensions. All needed functions for its flexible use in horizontal, vertical and dynamic applications are available.

## GUIDANCE

The **IMPACT Software**, powering all Datalogic **Machine Vision** devices ranging from **compact smart cameras** to **high-end vision processors**, is the ideal platform to develop Robot or Laser guidance applications. Powerful state-of-the-art pattern matching algorithms combined with advanced camera calibration and data communication functionalities result in quick and seamless application deployment.

## MEASUREMENT

A wide range of laser **Time of Flight (TOF)** and **Ultrasonic** technology based sensors, commonly used in level and position control, as well as **measurement light grids**, with different heights and resolutions together with easy and effective programming modality, applied in the precise and accurate detection of the material dimensions during working compose the Datalogic measurement portfolio.

## DETECTION

Datalogic offers a best-in-class comprehensive product portfolio of **sensors** mainly based on light technology. Color or luminescence sensors as well as slot sensor for counting or positioning, background suppression and polarized retro-reflex sensors with LED or LASER emission are some of the solutions available for Automotive applications. Complete the offer a wide range of **inductive sensors** and **rotary encoders**.

## INSPECTION

**IMPACT Software Suite**, with over 120 inspection tools and 50 user interface controls, allows users to create unique inspection programs and develop user interfaces quickly and easily. Feature locating, flaw detection, surface inspection, pattern matching, measurement and color analysis are just few examples of the wide range of tools available to perform an accurate and 24/7 consistent quality inspection of the production thus reducing the non-quality costs and recall rate.



We provide the best custom center

## TRACEABILITY

Datalogic offers the most comprehensive portfolio of products and solutions in the marketplace to deploy total traceability systems for components, sub-assemblies and finished goods. Starting from the marking of data directly onto parts (Direct Part Marking - DPM), with a broad range of **laser markers** powered by the three main laser technologies i.e. Fiber, DPSS and CO2 fulfilling every customer need for permanent high quality marking on any material.

Moving to fixed **1D and 2D unattended barcode readers**, based on cutting-edge technologies such as imagers, electronic focus control, powerful lighting systems and equipped with the most recent communication protocols like industrial fieldbus and OPC-UA.

Fixed barcode readers and laser markers can be also combined together through **MARVIST™** (Mark Read Verify Integrated Solution) the software suite allowing laser markers to interact with AutoID code reader seamlessly for in-line validation of marked codes.


The barcode reading product portfolio is then enriched by the widest range of **rugged or general purpose handheld scanners** equipped with powerful state-of-the-art scan engines to tackle even the most challenging applications like DPM or long distance 2D code reading.

The Datalogic cordless handheld readers embed unique technologies like wireless charging, STAR radio proprietary narrow-band for two-way communication and long-lasting batteries to maximize the life of the device and the return of investment.

The barcode reader portfolio is then completed by an extensive range of **mobile computers** ranging from well-established industrial rugged **Portable Data Terminals (PDT)** with physical keyboard to Android™ powered full touch **Portable Digital Assistant (PDA)**. The mobile computer portfolio also includes two other important families: rugged **vehicle mount computers** to provide forklift operators with a sturdy multi-touch interface to the Warehouse Management System and **industrial tablets** with great ergonomics and Gorilla® glass screen enabling a wide range of applications.


Additional opportunities to implement traceability solutions for automotive come from other technologies mastered by Datalogic among which a selection of Ultra High Frequency (UHF) **RFID** devices and **Optical Character Recognition (OCR)** capabilities with smart cameras and vision processors to read text strings such as serial or lot numbers.

ut our  
er at the  
offering  
quality

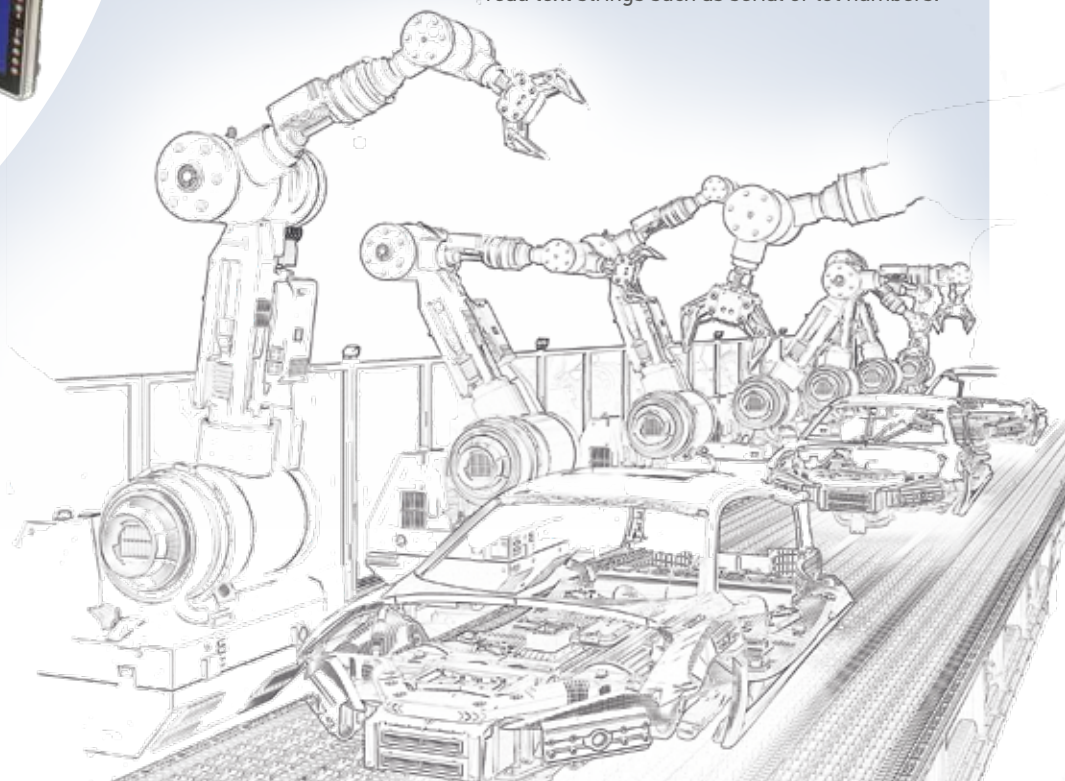



# LOGISTICS PARTS AND COMPONENTS

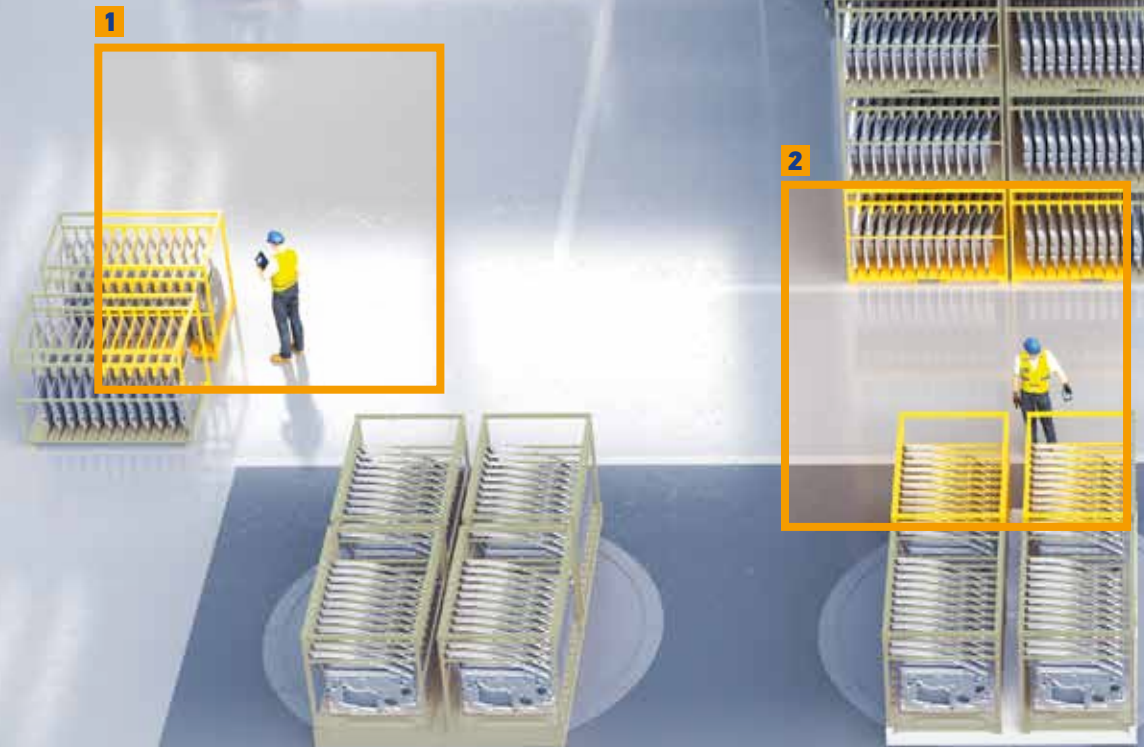

## 1. INVENTORY MANAGEMENT



Inventory management requires periodic verification of the goods stored in different locations. The Taskbook, a rugged tablet with optional handgrip that integrates a 2D imager and a hot swappable battery, represents the most efficient solution for tracking allowing one hand scan on 24/7 basis.

## 2. INBOUND QUALITY CONTROL



Material receiving results in a variety of activities including part identification, data entering into company ERP system and defective part notification (including visual information). Memor 10 PDA is the ideal operator companion enabling a wide range of different applications exploiting the power and flexibility of Android OS.





3

4

### 3. PICKING ON PRODUCTION LINE



In warehouse operations, workers have to track and report the picked parts in real time. The Falcon X4 mobile computers are the optimal choice for any application requiring reliable data collection in mobility offering maximum performances and ruggedness in an ergonomic design.


### 4. FORKLIFT SOLUTION



The PowerScan 2D Auto-Range ensures high reading performances of both 1D and 2D codes even at far operating distances. Combined with the SD9030 dongle and the Rhino II vehicle mount computer, it represents a complete solution for forklifts allowing operator to scan items with no need to get off the vehicle.



# POWERTRAIN

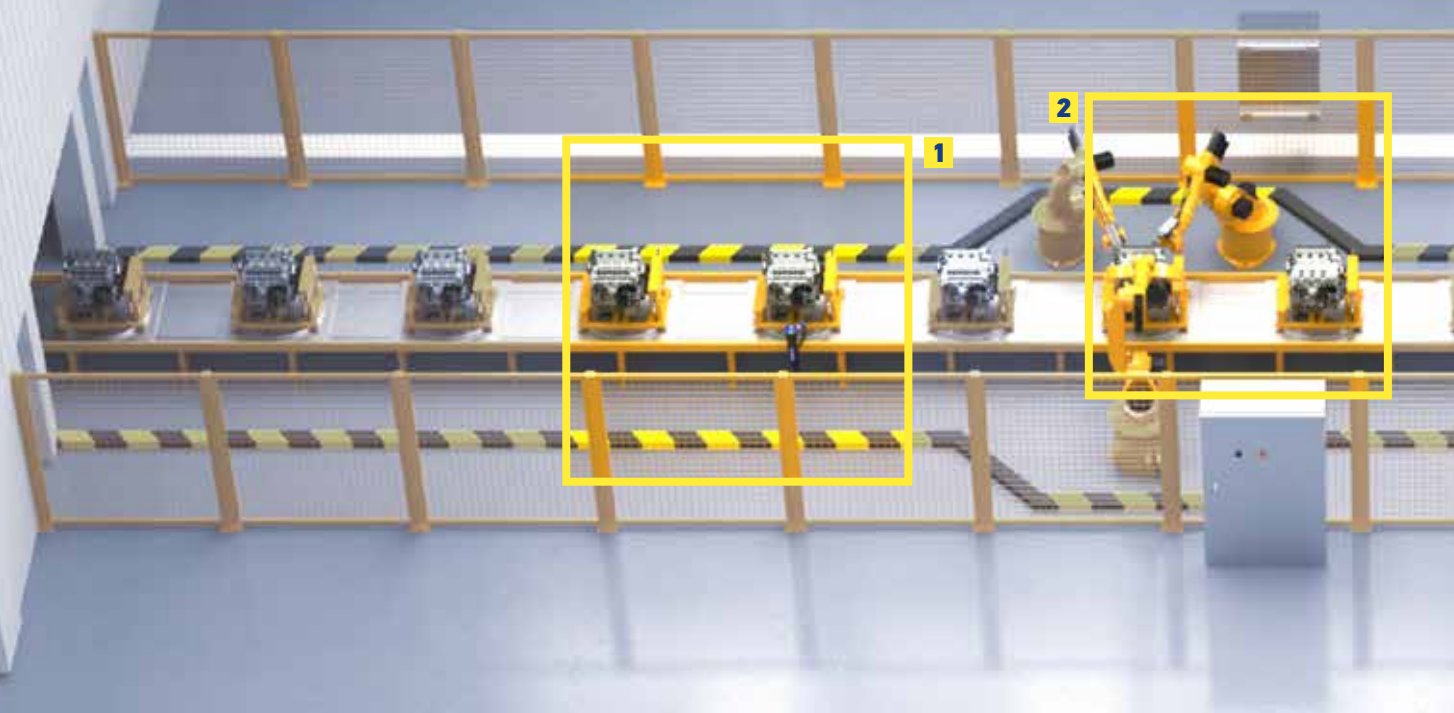

## 1. MARK & READ



Combining AREX 400 with Matrix 220, datamatrix code for traceability can be marked and verified at ease. Enabled by M.A.R.V.I.S software the two devices comply with the most demanding grading standards. Statistics and images are stored providing valuable insights for quality control and cost reduction.

## 2. ROBOT GUIDANCE



Robots are widely used in manufacturing processes to ensure high-quality even for tough operations. IMPACT, the Machine Vision software suite powering all Datalogic devices, offers all functionalities to easily deploy robot guidance applications including camera calibration, pattern matching and result communication.





3

4

5

### 3. QUALITY INSPECTION



The MX-E Vision Processor Series, powered by the IMPACT Software suite with 100+ advanced inspection tools, supports multiple individual cameras, allowing either to inspect complex items like engine blocks leveraging multiple points of view or to deploy several verification points along the manufacturing line.

### 4. ADHESIVE LAYER VERIFICATION




Quality standards along the production processes require accurate check points of the assembling phases. LD46 luminescence sensor is used to verify if the correct amount of adhesive layer has been applied on the edge of the engine head cylinders.

### 5. AUTONOMOUS VEHICLE SAFETY



A LASER SENTINEL safety laser scanner can be used to protect the AGV against collision with persons, vehicles and material. The configurable protective and warning fields are activated dynamically according to the speed or curve traveled.

# PAINT AND BODY SHOP

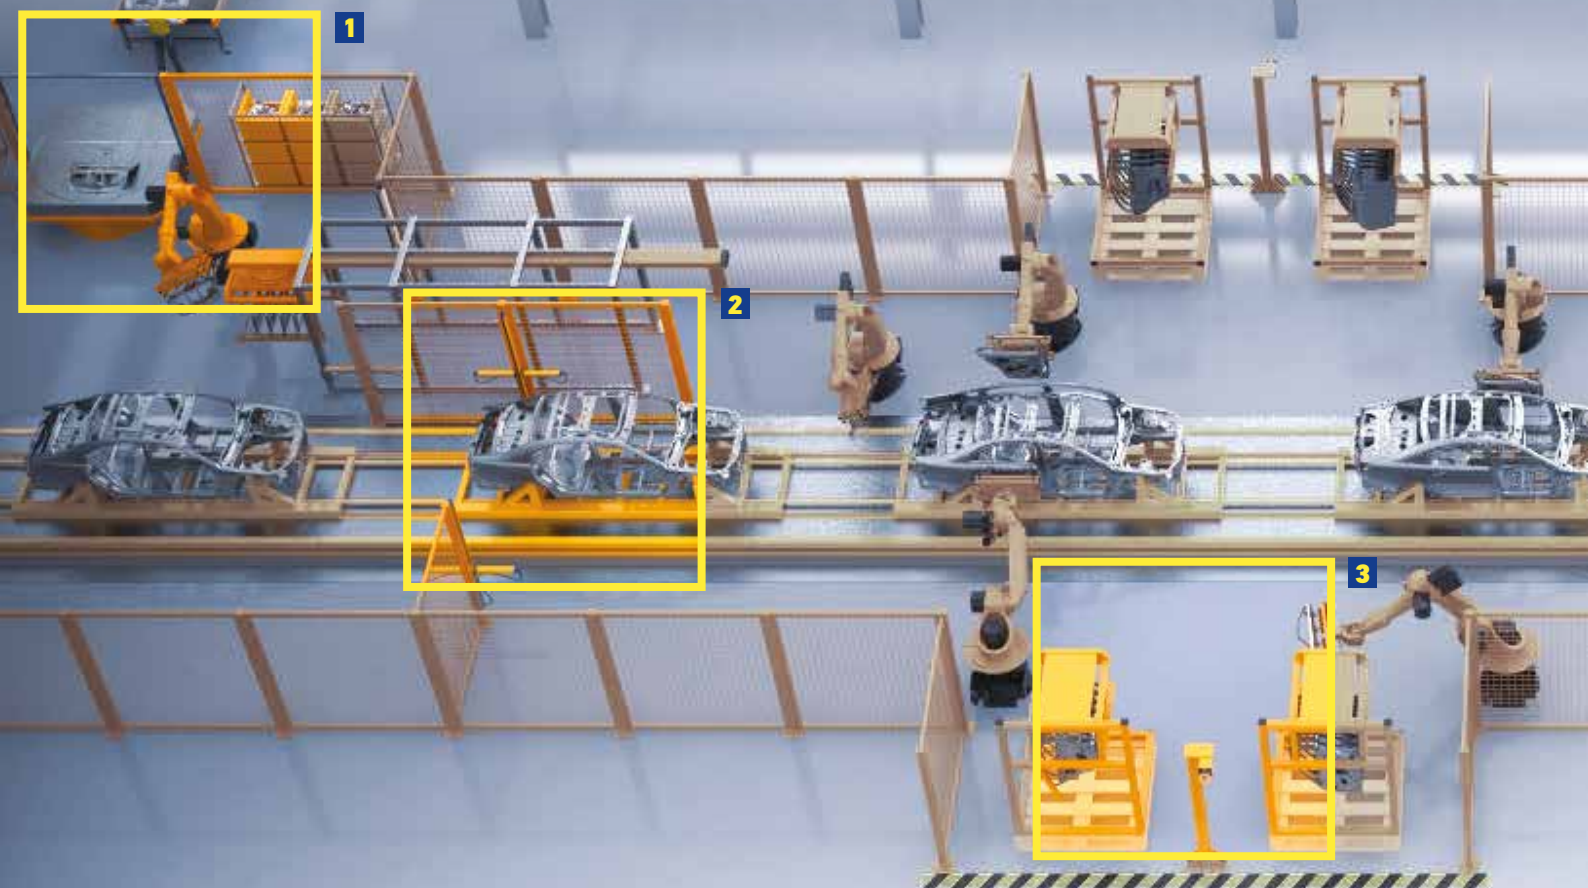

## 1. BODY PARTS ACCESS PROTECTION AT TURNTABLE




The LASER SENTINEL safety laser scanner for area monitoring prevents the start of a dangerous movement when someone is standing behind the light curtain. Automatic restart is possible when the hazardous area is empty.

## 2. PRESENCE DETECTION BEHIND A LIGHT CURTAIN FOR HAZARDOUS AREA PROTECTION



SG4 EXTENDED safety light curtains are used to separate cells in the paint line. Basic and Advanced configurations, for example partial muting on different areas, are possible through push buttons or Graphical User Interface.



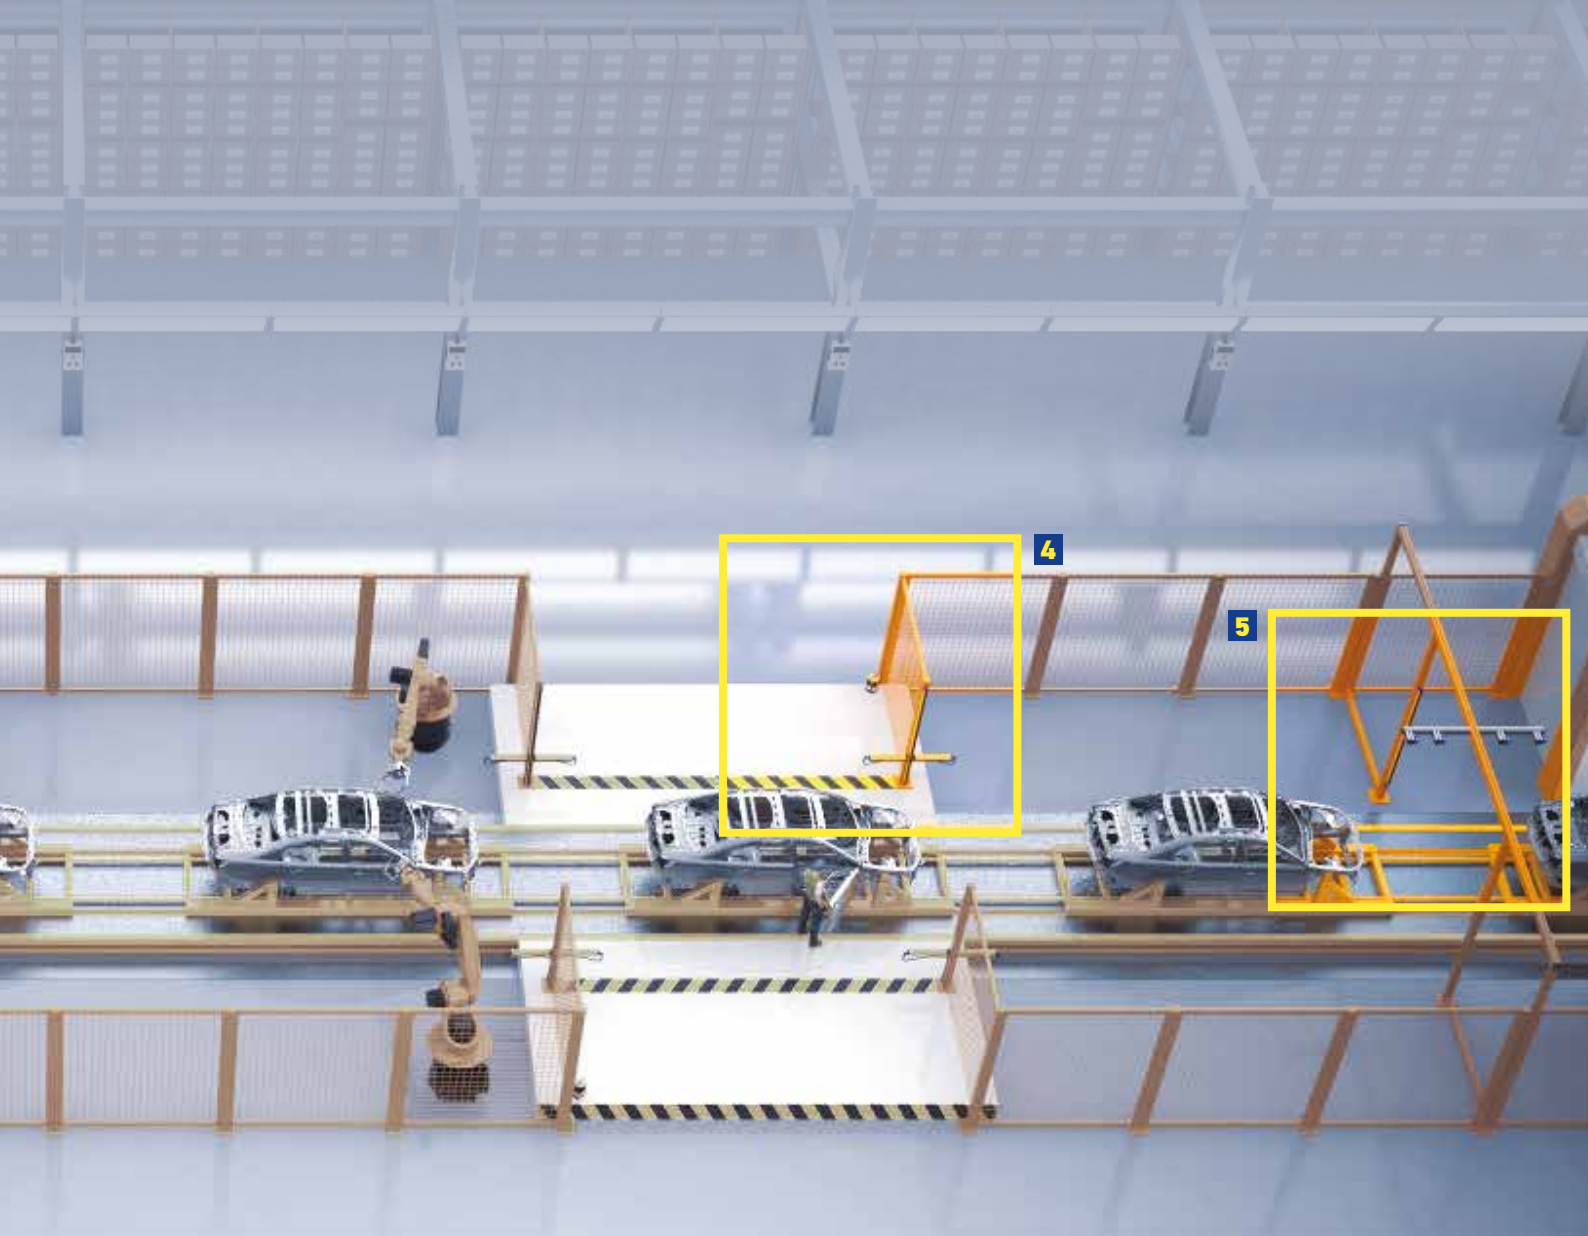

### 3. HAZARDOUS AREA PROTECTION ON MATERIAL RACKS



The safety laser scanner can monitor vertical openings through which people could enter into dangerous areas. Checking continuously the position of reference points, LASER SENTINEL guarantees that in case of mechanical changes, the dangerous movement could be stopped.

### 4. HAZARDOUS AREA PROTECTION AT THE REWORKING STATION



Areas around the car body are monitored using LASER SENTINEL safety laser scanner. Thanks to protective field of 5,5m, only two scanners are required for full protection of the work area. By using Master Slave connection, two scanners can be used together with a single point of programming and monitoring, and saving wiring and safety I/Os.


### 5. ACCESS PROTECTION WITH DIFFERENTIATION BETWEEN PEOPLE AND MATERIAL



In the course of the production process, the bodies are lifted or lowered to different transport levels. The SG4 EXTENDED safety light curtain prevents entry of a person into the hazardous area. The distinction between people and machine is made using S85-Y muting sensors.



# FINAL ASSEMBLY

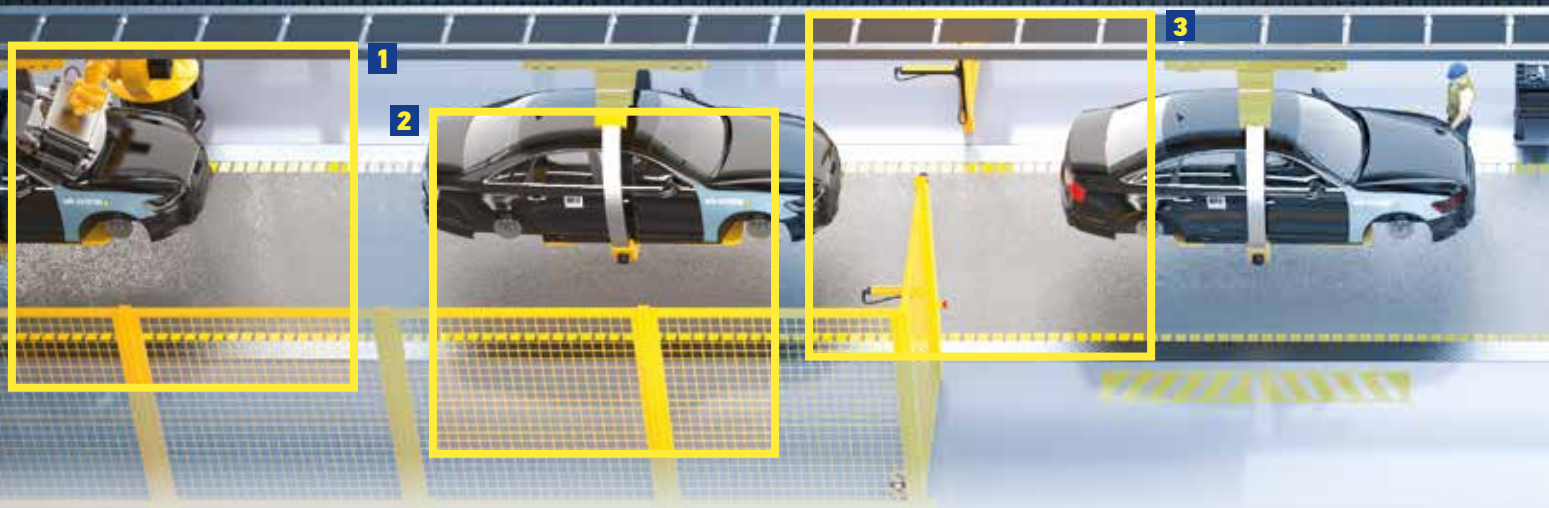

## 1. WINDSCREEN ASSEMBLING



Windscreen assembling requires an accurate approaching phase of the robot gripper in order to guarantee a precise and soft positioning of it. The S85 distance sensor based on TOF technology is used to measure the approaching distance of the robot gripper from the body shop.

## 2. AUTOMATIC UNATTENDED IDENTIFICATION




Automated assembling processes always require the identification of the car to ensure maximum quality and total production traceability. The Matrix 410N, featuring C-Mount lenses and powerful embedded illuminators, delivers robust barcode reading capabilities while covering a wide area.

## 3. MACHINERY SAFEGUARDING



Car bodies are lifted or lowered to different transport levels. The SG BODY REFLECTOR MUTING prevents entry of a person into the hazardous area leaving chassis to exit. The LASER SENTINEL monitors inner area preventing someone from standing behind the light curtain.



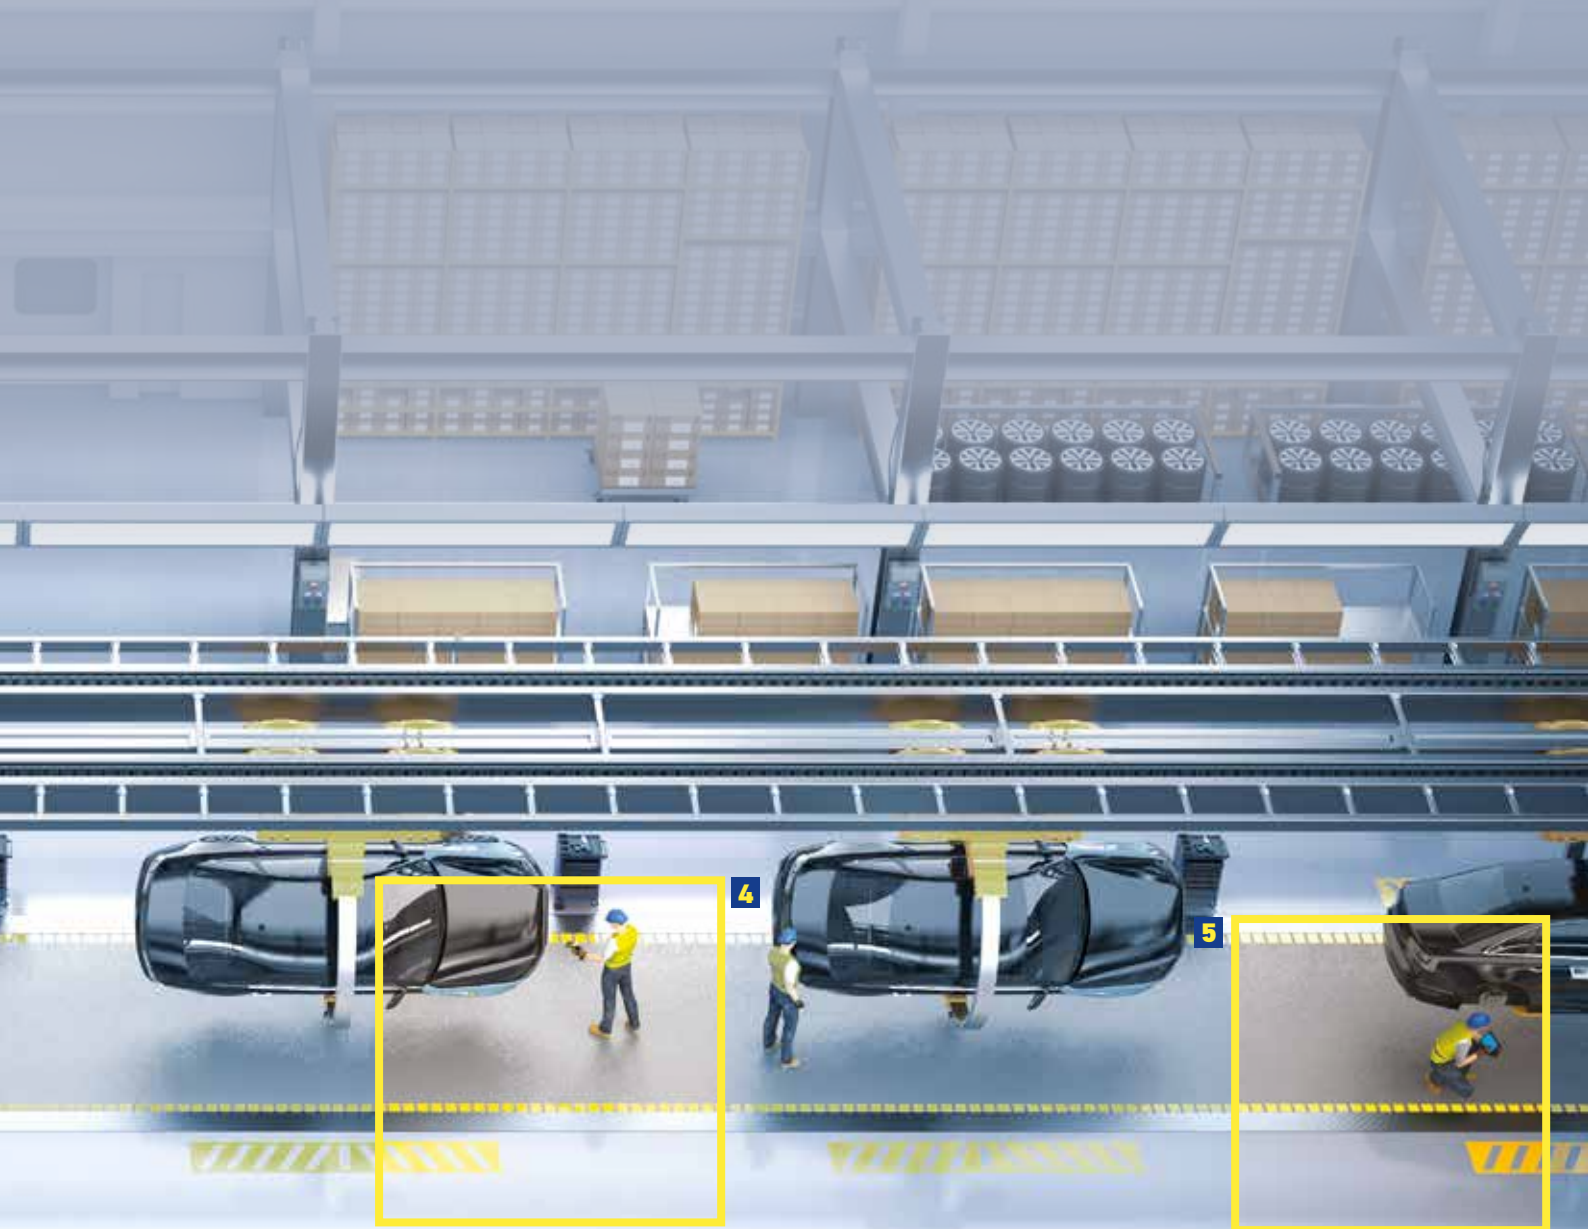

#### 4. WIP TRACEABILITY



Operators have to identify the car chassis at every assembling stage in order to keep track of the operation performed. The combination of PowerScan handheld scanners, SD9030 dongle and SH Blackline Panel PC delivers reliable barcode reading while providing real-time feedback for the operators.

#### 5. PRODUCTION QUALITY MONITORING



Along the production line, manual inspection points are defined to make sure results are in line with the quality standards. With the Taskbook, operators can benefit from having a portable yet rugged multi touch wide-screen tablet allowing to retrieve production data, take pictures and quickly report errors.

# AUTOMOTIVE PRODUCTS and SERVICES PORTFOLIO








# LASER MARKING SYSTEMS




|                             | AREX400  | UNIQ   | VLASE  |
|-----------------------------|--|--|--|
|                             |  <ul style="list-style-type: none"> <li>• Ultra compact Scanhead with high protection grade</li> <li>• High performance embedded controller</li> <li>• Robotic grade robust flexible conduit, Green Spot markign confirmation, buil in SLO (Safe Laser Off); UL listed</li> <li>• Full Lighter Software Suite with MARVIS (Code Mark &amp; Verify) support</li> </ul> |  <ul style="list-style-type: none"> <li>• Ultra compact laser units with IP54 protection grade</li> <li>• ALL-IN-ONE system design, no external controller, power supply</li> <li>• Built in SLO (Safe Laser Off)</li> <li>• Full Lighter Software Suite with MARVIS (Code Mark &amp; Verify) support</li> </ul> |  <ul style="list-style-type: none"> <li>• Compact, high performance laser</li> <li>• Resonator, High Peak power up to 60 kW</li> <li>• Infrared, Green and UV on same platform</li> <li>• Full Lighter Software Suite with MARVIS (Code Mark &amp; Verify) support</li> </ul> |
| <b>Wavelength</b>           | 1060-1080  | 1060-1080  | 1064, 532, 355   |
| <b>Nominal power</b>        | 10, 20, 30 , 50 & 20 MOPA  | 15   | 10, 20 INFRARED<br>10 GREEN, 3 UV  |
| <b>Repetition rate</b>      | 2 - 200 KHz  | 15 - 100 KHz   | 15-200 KHz   |
| <b>Pulse energy</b>         | 1 mJ   | 0.75 mJ  | up to 0.65 mJ  |
| <b>Marking capabilities</b> | Static, Rotary Axis, on the fly (marking in motion)  |  |  |
| <b>I/O &amp; interfaces</b> | 3x Ethernet, RS232, 6x USB<br>Programmable Digital I/O<br>built in controller for 4 mechanical axis<br>Dedicated connectors for Encoder, Photocell, Code reader, Smart camera, Displacement sensor   | 1x Ethernet, RS232, 4x USB<br>Programmable Digital I/O<br>built in controller for 4 mechanical axis<br>Dedicated connectors for Encoder, Photocell   | 1x Ethernet, RS232, 4x USB<br>Programmable Digital I/O<br>built in controller for 4 mechanical axis<br>Dedicated connectors for Encoder, Photocell   |
| <b>Power supply</b>         | 100/240 VAC 50/60Hz  |  |  |
| <b>Cooling system</b>       | AIR  |  |  |
| <b>Temperature range</b>    | 5 to 40 °C [41 to 104 °F]  |  |  |
| <b>IP grade</b>             | IP64 HEAD - IP31 RACK  | IP54   | IP44 HEAD - IP21 RACK  |
| <b>Head dimension</b>       | 89 x 96 x 311 mm<br>[3.5 x 3.7 x 12.2 in]  | 183 x 150 x 497 mm<br>[7.2 x 5.9 x 19.5 in]  | 166 x 128 x 686 mm<br>[6.5 x 5.03 x 27 in]   |
| <b>Head weight</b>          | 3.3 Kg / 72.7 lb   | 3.1 Kg / 68.3 lb   | 3.7 Kg / 81.5 lb   |

# STATIONARY INDUSTRIAL SCANNERS

|  | MATRIX 120™   | MATRIX 220™   | MATRIX 300N™  |
|--|---|---|---|
|  |  <ul style="list-style-type: none"> <li>Ultra compact dimensions for easy integration</li> <li>Smart user selectable focus for high application flexibility</li> <li>ESD and Polarized Versions</li> </ul> |  <ul style="list-style-type: none"> <li>All-In-One DPM illuminator for strong DPM reading performance</li> <li>Smart electronic focus control for high reading flexibility</li> <li>New multicore image processing platform excellent for high speed applications</li> </ul> |  <ul style="list-style-type: none"> <li>High power illuminators for long range reading distances</li> <li>High performance DPM reading</li> <li>Both manual and electronic focus control options</li> </ul>  |
| <b>Reading distance (min / max)</b>      | WVGA models<br>25-190 mm [1.0-7.5 in]<br>1.2 MP models<br>25-220 mm [1.0-8.7 in]  | STD-W & STD-W HP models<br>7 mm lens: 40-400 mm [1.6-15.7 in]<br>12 mm lens: 40-600 mm [1.6-23.6 in]<br>DPM-R & DPM-B models<br>7 & 12 mm lenses: 40-300 mm [1.6-11.8 in]<br>DPM-R HP models<br>7 mm lens: 40-400 mm [1.6-15.7 in]<br>12 mm lens: 40-600 mm [1.6-23.6 in]   | <u>Standard models</u><br>9 mm lens: 20-650 mm [0.78 to 25.5 in]<br>16 mm lens: 40-1200 mm [1.57 to 47.2 in]<br><u>Polarized models</u><br>9 mm lens: 20-350 mm [0.78 to 13.7 in]<br><u>Diffused models</u><br>9 mm lens: 20-50 mm [0.78 to 13.7 in]<br>16 mm lens: 40-450 mm [1.57 to 17.7 in]   |
| <b>Focusing system</b>                   | Manual adjustment in three precalibrated positions (45, 70, 125mm - WVGA; 45, 80, 125 mm - 1.2 MP)  | Electronic focus control  | 1.3 MP models: Electronic for liquid lens models (LQL-9mm) - Manual for fixed lens models (LNS-6mm, LNS-9mm, LNS-12mm, LNS-16mm)<br>2 MP models: Electronic Focus Control with Liquid Lens (LQL-9mm, LQL-16mm)  |
| <b>Sensor</b>                            | CMOS sensor WVGA - 752x480 px<br>CMOS sensor 1.2 MP - 1280x960 px   | CMOS sensor - 1280x960 px   | 1.3 MP models: CMOS sensor SXGA - 1280x1024 px<br>2 MP models: CMOS sensor UXGA - 1600x1200 px  |
| <b>Frame rate</b>                        | 57 frame/s (WVGA model)<br>36 frame/s (MP model)  | 45 frames/s   | 1.3 MP models: 60 frame/s<br>2 MP models: 45 frame/s  |
| <b>Code reading capabilities</b>         | Omnidirectional on any code type  |   |   |
| <b>IP rating</b>                         | IP65  | IP65, IP67  |   |
| <b>Temperature range</b>                 | 0 to 45 °C [32 to 133 °F]   | -10 to 50°C [14 to 122 °F]  | 1.3 MP models: Manual Focusing models: 0° to 50 °C (32 to 122°F) - Electronic Liquid Lens models: 0° to 45 °C (32 to 113°F)<br>2 MP models: 0 to 45 °C (32 to 113 °F)   |
| <b>Case material</b>                     | Zama (Zinc Alloy) - Plastic reading window cover  | Aluminum case and plastic protective window cover   | 1.3 MP & Diffused 2 MP models: Aluminum case and plastic protective window cover<br>Standard and Polarized 2MP models: Aluminum case and black aluminum protective window cover   |
| <b>Dimensions (typical value)</b>        | 45.4 x 31.1 x 23.5 mm [1.8 x 1.2 x 1 in] (SER+USB model)<br>45.4 x 48.5 x 23.5 mm [1.8 x 1.9 x 1 in] (SER+ETH model)  | 78 x 47 x 38 mm [3.07 x 1.85 x 1.50 in] Connector at 0°<br>57 x 47 x 58 mm [2.63 x 1.85 x 2.30 in] Connector at 90°   | 1.3 MP & Standard/Polarized 2 MP models: 95 (height) x 54 (width) x 45 (length) mm (3.7 x 2.1 x 1.8 in) Connector at 0°<br>75 (h) x 54 (w) x 64 (l) mm (3.0 x 2.1 x 2.5 in) Connector at 90°<br>Diffused 2MP models: 95 (h) x 54 (w) x 43 (l) mm (3.7 x 2.1 x 1.7 in) - Connector at 0°<br>75 (h) x 54 (w) x 62 (l) mm (3.0 x 2.1 x 2.4 in) |
| <b>Weight</b>                            | 117 g [4.1 oz] with cable (SER+USB model)<br>- 200 g [7.1 oz] with cable (SER+ETH model)  | 173 gr [6.1 oz]   | 1.3 MP models: 238 g (8.3 oz.) with lens and internal illuminator<br>Standard 2MP models: 9 mm lens: 250 g/8.8 oz<br>16 mm lens: 273 g/9.6 oz<br>Polarized 2 MP models: 9 mm lens: 274 g/9.6 oz<br>Diffused 2MP models: 9 and 16 mm lenses: 236 g/8.3 oz  |
| <b>Yag laser protection and ESD safe</b> | NO  | YES, available as front cover accessory   | YES   |
| <b>POE models</b>                        | ---   | YES   |   |
| <b>Embedded communication interfaces</b> | RS-232/RS-422/USB 2.0 high speed (USB-CDC, USB-HID)<br>Main RS-232 or RS-422 FD (2400 to 115200 bit/s)  | All models except PoE:<br>- Ethernet 10/100 Mbit/s: TCP/IP, UDP, FTP and Fieldbus PROFINET IO, Ethernet IP, Modbus TCP<br>- Serial RS-232/RS422FD up to 115.2 Kbit/s + Serial Aux RS-232 (only Serial Aux RS-232 for PoE models)<br>- OPC UA  | Ethernet 10/100 Mbit/s: Ethernet IP, TCP/IP, UDP, FTP, Modbus TCP, PROFINET IO<br>Serial RS232/RS422FD up to 115.2 Kbit/s + Aux RS232   |
| <b>Xpress interface™</b>                 | YES   |   |   |
| <b>Digital inputs</b>                    | 2 SW Programmable (PNP/NPN)   | All models except PoE: 2 inputs opto-coupled and polarity insensitive<br>PoE models: 1 input opto-coupled and polarity insensitive  | 2 optocoupled and polarity insensitive  |
| <b>Digital outputs</b>                   | 2 SW Programmable (PNP/NPN)   | 3 Outputs (not available on PoE models): Configurable NPN, PNP, PP short-circuit protected  | 3 Outputs: Configurable NPN, PNP, PP short-circuit protected (using CBX the first 2 outputs are optocoupled)  |
| <b>Device programming</b>                | Windows™ based SW (DL.CODE™) via Ethernet   |   | DL.CODE™ Windows-based software (programming via Ethernet or Serial Interface) with Javascript output formatter Host Mode programming<br>X-PRESS™ Human Machine Interface   |



# STATIONARY INDUSTRIAL SCANNERS




| MATRIX 410N™   | MATRIX 450N™  | DS5100  |
|--|---|---|
|   |   |    |
| <ul style="list-style-type: none"><li>Patented ultra-fast strobed lighting with stable effect for operator</li><li>Patent Pending Packtrack 2D for short object gapping in sortation applications</li><li>Single reading point or multiple device cluster with easy and flexible configuration</li></ul> | <ul style="list-style-type: none"><li>Gigabit Ethernet integrated connectivity</li><li>Adjustable focus through C-Mount lenses</li><li>White and blue lighting options continuous, no-flashing lighting</li></ul> | <ul style="list-style-type: none"><li>Medium, Long Range, Linear and Oscillating Mirror models, selectable focus for high application flexibility</li><li>Selectable focus system</li><li>Display and multi-language messages</li></ul>   |
| 50-2000 mm [1.97 - 78.74 in]   | 300-3000 mm [11.81 - 118.11 in]   | Medium range: 200 - 1000 mm [7.87 - 39.3 in]<br>Long Range: 300 - 1400 mm [11.8 - 55.11 in]   |
| Adjustable Focus   | Adjustable Focus  | Mechanically adjustable focus with locking  |
| CMOS sensor SXGA - 1280x1024 px<br>CMOS sensor UXGA - 1600x1200 px   | CCD sensor - 2448 x 2050 px   | ---   |
| 60 frames/s (SXGA model)<br>45 frames/s (UXGA model)   | 15 frames/s   | 800 scan/s  |
| Omnidirectional on any code type   |   | over than +/-45°  |
| IP67   | IP65  |   |
| 0 to 50 °C [32 to 122 °F]  | 0 to 50 °C [32 to 122 °F]   | 0 to 50 °C [32 to 122 °F]   |
| Aluminum   |   |   |
| 123 x 60.5 x 87 mm [4.84 x 2.38 x 3.42 in]<br>with protective lens cover   | 170 x 200 x 150 mm [6.69 x 7.87 x 5.90 in]  | DS5100-X2XX LIN: 101 x 85 x 42 mm<br>(3.98 x 3.35 x 1.65 in)<br>OM: 116.7 x 123.6 x 48.4 mm<br>(4.60 x 4.86 x 1.90 in)<br>DS5100-X3XX LIN: 101 x 104.2 x 42 mm (3.98<br>x 4.1 x 1.65 in)<br>OM: 116.7 x 142.9 x 48.4 mm<br>(4.60 x 5.626 x 1.90 in)<br>DS5100-X4XX LIN: 117.75 x 104.6 x 42 mm<br>(3.98 x 4.12 x 1.65 in)<br>OM: 125.8 x 143.3 x 48.4 mm<br>(4.95 x 5,64 x 1.90 in) |
| 482g [17 oz] with lens and internal illuminator  | 3 kg [105.8 oz] with lens   | DS5100-X2XX LIN: 580 g<br>OM: 775 g<br>DS5100-X3XX LIN: 520 g<br>OM: 715 g<br>DS5100-X4XX LIN: 550 g<br>OM: 745 g   |
| YES (with accessories)   | ---   |   |
| ---  |   |   |
| ---  |   |   |
| - Ethernet 10/100 Mbit/s: PROFINET-IO, Ethernet/IP, TCP/IP, FTP, Modbus TCP<br>- Serial: RS232 / RS422 FD, Serial Aux RS232  | - Ethernet 10/100 Mbit/s: TCP/IP, Ethernet IP and Modbus TCP<br>- Serial: RS232 / RS422 FD, Serial Aux RS232  | - Ethernet 10/100 Mbit/s: Ethernet/IP, Ethernet TCP/IP, PROFINET-IO and Modbus TCP<br>- Serial: Main port RS232/RS485 FD Serial Aux RS232   |
| YES  |   |   |
| 2 SW programmable, optocoupled and polarity insensitive  |   | DS5100-X2XX: 2 Input (optocoupled, NPN/PNP)<br>DS5100-X3XX: 2 Input (optocoupled, NPN/PNP)<br>DS5100-X4XX: 1 Input (optocoupled, NPN/PNP)   |
| 3 SW programmable, optocoupled   |   | DS5100-X2XX: 2 Outputs (optocoupled)<br>DS5100-X3XX: 2 Outputs (non-optocoupled)<br>DS5100-X4XX: ---  |
| Windows™ based SW (DL.CODE™) via Ethernet  |   | Windows™ based SW (Genius)  |

# HAND HELD SCANNERS

| POWERSCAN™  | GRYPHON™ 4500  | RIDA  |
|---|--|---|
|  <ul style="list-style-type: none"><li>• Different reading technologies to fit all applications</li><li>• Example of ruggedness and durability</li><li>• Datalogic's STAR Cordless System 2.0 proprietary narrow band radio</li><li>• 3-second battery replacement</li></ul> |  <ul style="list-style-type: none"><li>• Ultimate design and undisputed ergonomics</li><li>• High-res megapixel sensor for outstanding results</li><li>• Wireless charging (no need for contact cleaning or maintenance procedures)</li><li>• Powerful long lasting battery easy replaceable</li></ul> |  <ul style="list-style-type: none"><li>• Small, ergonomic, perfectly hand-fitted</li><li>• Innovative, unique and compact design for a new and modern operator's experience</li><li>• Compatible with Android, Apple iOS and Windows Mobile devices</li><li>• Vibration and good read feedback</li></ul> |
| Linear Imager, Laser, Area imager   | Area Imager  |   |
| Instinctive / Distance<br>Auto Range<br>DPM Models: Contact / Instinctive   | Distance   | Instinctive   |
| Laser line, 4-Dot/Center Cross Aimer,<br>Frame Aimer/Center Cross   | 4-Dot/Center Cross Aimer   | 4-Dot Aimer   |
| Yes (95XX model)  | ---  | ---   |
| 1D and 2D   | 1D, 2D and Dotcode   | 1D and 2D   |
| DPM Model   |  | ---   |
| YES   |  |   |
| YES   |  |   |
| YES   |  |   |
| IP65  | IP52   |   |
| 2.0 m / 6.6 ft  | 1.8 m / 5.9 ft   | 1.5 m / 5.0 ft  |
| 3 Years   | GD4500: 5 Years;<br>GBT4500, GM4500: 3 Years   | 3 Years   |
| Bluetooth® 3.0<br>STAR: 433 or 910 MHz  | Bluetooth® 4.0<br>STAR: 433 or 910 MHz   | Bluetooth® 4.0  |
| BT: Up to 100 m / 328 ft<br>433: Up to 100 m / 328 ft<br>910: Up to 400 m / 1,312 ft  | BT: Up to 100 m / 328 ft<br>STAR: Up to 50 m / 164 ft  | 25.0 m / 82.0 ft  |
| PM9100, PM93XX AR, PM9500   | ---  |   |
| YES   |  |   |
| Li-Ion 2150 mAh   | Li-Ion 3250 mAh  | Li-Ion 700 mAh  |
| 60,000 +  | GBT: 80,000 + / GM: 60,000 +   | ---   |



# VISION SYSTEMS

| MX-E SERIES   | P SERIES   | A/T SERIES   |
|---|--|--|
| <div></div> <ul style="list-style-type: none"><li>Multi-camera vision processors</li><li>GigE Vision camera connectivity</li><li>Three models with different processing capabilities</li></ul> | <div></div> <ul style="list-style-type: none"><li>Right-angle IP67 rated enclosure with rotating connectors</li><li>VGA (640x480) or 1.3 MP (1280x1024) with color or grey-scale imagers</li><li>Embedded interchangeable lenses and illuminators</li></ul> | <div></div> <ul style="list-style-type: none"><li>High performance Smart Camera series (T-Series)</li><li>Up to 5Mpix grey-scale imager (T-Series)</li><li>Gbit Ethernet Port</li></ul> |
| ---   | Right angle (with rotating connectors)   | Right angle  |
| Support for up to four POE GigE cameras<br>640 x 480 up to 2448 x 2048<br>(up to 16MP with 3rd party cameras).  | 640 x 480, 1/4" CMOS, 120 fps<br>1280 x 1024, 1/1.8" CMOS, 60 fps  | 640 x 480, 1/3" CCD, 60 fps (A/T-Series)<br>1600 x 1200, 1/1.8" CCD, 15 fps (T47)<br>2448 x 2048, 2/3" CCD, 15 fps (T49)   |
| Area Scan Grayscale, Area Scan Color, Linescan, and 3D  | 8 bit gray-scale<br>24 bit color   | 8-bit gray-scale   |
| C-Mount and F-Mount   | Embedded lenses  | C-Mount  |
| Intel® Celeron 1047UE 1.4 Ghz – dual core (MX-E20)<br>Intel® Celeron 1020E 2.2 Ghz – dual core (MX-E40)<br>Intel® Core i7 3615QE 2.3 Ghz – quad core (MX-E80)   | 660 MHz DSP  | 800 MHz DSP (A-Series)<br>1.1 GHz DSP (T-Series)   |
| ---   | Up to 16   |  |
| 60GB (MX-E20/40)<br>128GB (MX-E80)  | 256 MB flash   |  |
| 32x opto-isolated digital inputs / outputs<br>(16 IN - 16 OUT), NPN or PNP  | 2 INPUT<br>3 OUTPUT  |  |
| YES   |  |  |
| YES<br>Supports Ethernet/IP, Modbus TCP and OPC, Profinet   |  | YES<br>Supports Ethernet/IP, Modbus TCP and OPC  |
| ---   | YES  |  |
| 24 Vdc +/- 25%  | 10 - 30 Vdc  |  |
| 5.5 A @ 24 Vdc  | 0.7 - 0.2A   | 1 - 0.33 A (A-SERIES)<br>1 - 0.33 A (T40)<br>1.05 - 0.35 A (T47)<br>1.2 - 0.4 A (T49)  |
| 270 x 130 x 255 mm [10.6 x 5.1 x 10 in]   | 95 x 54 x 43 mm [3.7 x 2.1 x 1.7 in]<br>Connector @ 0°<br>75 x 54 x 62 mm [3.0 x 2.1 x 2.4 in]<br>Connector @ 90°  | 123 x 60 x 86 mm<br>[4.84 x 2.36 x 3.41 in] - (A-Series)<br>123 x 60 x 101 mm<br>[4.84 x 2.36 x 3.98 in] - (T-Series)  |
| IP20  | IP67   |  |
| 0 to 55° C<br>[32 to 131° F]  | 0 to 50° C<br>[32 to 122° F]   | 0 to 45° C [32 to 113° F] (A-Series)<br>0 to 50° C [32 to 122° F]  |
| 10 to 90%   | 0 to 90%   | 0 to 90%   |

# SAFETY

## SLS STAND ALONE



## SLS MASTER/SLAVE



- More than 72 m<sup>2</sup> safely monitored, with 5.5 m / 180.
- High detection performances in compact size
- Advanced dust filtering

|  |  |                        |
|--|--|------------------------|
| Type (EN61496-1)   | 3  |                        |
| PL (EN ISO 13849-1)  | d  |                        |
| SIL (IEC 61508)  | 2  |                        |
| Detection capability   | 30/40/50/70/150 mm [1.2/1.6/2/2.8/5.9 in] selectable                 |                        |
| Angular resolution   | 0.1°   |                        |
| Safety zone operating range                                  | 0.05 - 5.5 m / 0,16 - 18 ft  |                        |
| Warning zone max operating range                             | 0.05 - 40 m / 0,16 - 131,2 ft with remission of target = 90% (white) |                        |
| Max. number of simultaneous warning zones                    | 2  |                        |
| Max. opening angle   | 275°   |                        |
| Tolerance zone   | 100 mm [3.9 in]  |                        |
| Power supply (Vdd)   | 24 Vdc ± 20%   |                        |
| Output current   | 0.25 A max / each OSSD   |                        |
| Output Capacitive load                                       | 2.2 uF @ 24Vdc max   |                        |
| Input Load current   | 6 ... 15 mA  |                        |
| Input saturation voltage                                     | > 15 V   |                        |
| Input Capacitive Load  | 22 uF  |                        |
| Operating temperature  | -10 to 50 °C [14 to 122 °F]  |                        |
| Storage temperature  | -20 to 70 °C [-4 to 158 °F]  |                        |
| Humidity   | 15 to 95 % (no condensation)   |                        |
| IP rating  | IP65 (EN 60529)  |                        |
| Connector used   | M12 8 pin  | M12 17 pin + M12 8 pin |
| Safety Outputs (OSSDs)                                       | 1 x 2  | 3 x 2                  |
| Configurable Inputs/Output                                   | 3  | 18                     |
| Response time  |  |                        |
| for main unit  | Min: 62 ms; Max: 482 ms  |                        |
| for any additional slave unit                                | ---  | 10 ms                  |
| Max. Zone sets number in any activation order (*1):          |  |                        |
| with 1 safety zone   | 3  | 70                     |
| with 1 safety zone + 1 warning zone                          | 2  | 70                     |
| with 1 safety zone + 2 warning zone                          | ---  | 70                     |
| with 2 safety zones  | ---  | 70                     |
| with 2 safety zones + 1 warning zone                         | ---  | 70                     |
| with 2 safety zones + 2 warning zones                        | ---  | 70                     |
| with 3 safety zones  | ---  | 70                     |
| Max. Zone sets number in a particular activation order (*2): | 6 (*2)   | ---                    |
| Zone set input switching time                                | Min: 30 ms; Max: 5000 ms   |                        |
| Manual / automatic restart                                   | YES  |                        |
| Reset (power cycle)  | YES  |                        |
| Total Muting (monodirectional or bidirectional)              | YES  |                        |
| Partial muting, dynamic for 1st OSSDs couple                 | YES  |                        |
| Reference Points   | YES  |                        |
| Override   | YES (*3)   | YES                    |
| Muting Lamp  | YES  |                        |
| Muting Enable  | YES (*3)   | YES                    |
| Clean Window Alarm   | ---  | YES                    |
| Generic Fault Alarm  | YES  |                        |
| Shut off   | YES  |                        |
| Advanced Measurement data                                    | YES (*4)   | YES (*5)               |
| Measurement data angular resolution                          | 0.1°   |                        |

### NOTES

(\*1) The max number of zone sets switching is reached when all available inputs are used for zone set switching

(\*2) With 1 safety zone only, up to 3 zone sets are available in any activation order. Up to 6 are available only using some allowed activation order. Refer to Manual and GUI for details.

(\*3) Override Input, Muting Enable input and Muting Lamp output on SLS-SAx are mutually exclusive




(\*4) Using the programming connector on the front of the device

(\*5) Using the rotating connector in the back of the device



# SAFETY

SAFETY




|                                 | SG4 EXTENDED  | SG4 BODY COMPACT  | SG BODY REFLECTOR   |
|---------------------------------|---|---|---|
|                                 | <div></div> <div><ul style="list-style-type: none"><li>Up to 20m / 65.6 ft operating range and 1800m / 5905.5 ft protected height</li><li>Cascade connection of up to 3 units</li><li>Ethernet Interface for programming, monitoring and error logging</li></ul></div> | <div></div> <div><ul style="list-style-type: none"><li>Controlled heights of 500, 800, 900 and 1200 mm [19.6, 31.4, 35.4, 47.2 in]</li><li>Simple configuration through DIP switches</li><li>Integrated muting lamp (only on muting models)</li></ul></div> | <div></div> <div><ul style="list-style-type: none"><li>Simple configuration through DIP switches</li><li>Integrated muting lamp (muting models) and external muting enable signal</li><li>Anti-interference coding</li></ul></div> |
| Type (EN61496-1)                | 4   |   |   |
| PL (EN ISO 13849-1)             | e   |   |   |
| SIL (IEC 61508)                 | 3   |   |   |
| Resolution                      | 14, 30 mm [0.55,1.18 in]  | 315 mm [12.4 in] (4 beams)<br>415 mm [16.3 in] (3 and 4 beams)<br>515 mm [20.2 in] (2 beams)  | 319,75 mm [1258.8 in] (4 beams)<br>419,75 mm [1652.5 in] (3 and 4 beams)<br>519,75 mm [2046.2 in] (2 beams)   |
| Protected height                | 300 – 1800 mm [11.8 – 70.8 in]<br>(with 150 mm [5.9 in] steps)  | 515 mm [20.2 in] (2 beams)<br>815 mm [32 in] (3 beams)<br>915 or 1215 mm [36 or 47.8 in] (4 beams)  | 500 mm [19.6 in] (2 beams)<br>800 mm [31.4 in] (3 beams)<br>900 or 1200 mm [35.4 or 47.2 in] (4 beams)  |
| Operating distance              | 0.2 to 7 m / 6.5 – 22.9 ft<br>(14 mm [0.5 in] resolution)<br>0.2 to 20 m / 6.5 to 65.6 ft (30 mm [1.1 in] resolution)   | 0.5 to 50 m / 0.16 – 164 ft   | 0.5 to 8 m / 0.16 – 26.2 ft<br>0.5 to 6.5 m / 0.16 – 213.2 ft (for SG4-RB4-090-00-E)  |
| Dead zone                       | No dead zone  | ---   |   |
| Power supply (Vdd)              | 24 Vdc ± 20   |   |   |
| Outputs                         | 2 PNP, with short circuit protection<br>2 PNP   | 2 PNP   |   |
| Output current                  | 0.5 A max/each output   |   |   |
| Capacitive load                 | 2.2 uF @ 24Vdc max  | 65 nF max at 25°C [77 °F]   | 2,2 uF max at 25°C [77 °F]  |
| Response time                   | 13 to 33 ms depending on model  | 14 to 16 ms depending on model  | 11 to 12 ms depending on model  |
| Cable length (for power supply) | 50 m / 164 ft max   |   | 70 m / 229.6 ft max   |
| Operating temperature           | 0 to 50 °C [32 to 122 °F]   | 0 to 55 °C [32 to 131 °F]   |   |
| Humidity                        | 15 to 95 % (no condensation)  |   |   |
| IP rating                       | IP65 (EN 60529)   |   |   |
| Anti-interference coding        | YES   | ---   | YES   |
| Muting                          | YES   |   | YES   |
| Partial muting                  | YES   |   | ---   |
| Override                        | YES   |   | YES   |
| Floating blanking               | YES   |   | ---   |
| Fixed blanking                  | YES   |   |   |
| Reduced resolution              | YES   |   |   |

# MOBILE COMPUTERS

|  | SKORPIO™ X4   | FALCON™ X4   | MEMOR™ 10   |
|--|---|--|---|
|  |  <ul style="list-style-type: none"> <li>• 2 choices of Operating Systems: Windows Embedded Or Android™ Operating Systems</li> <li>• 1D and 2D choices of scan engine</li> <li>• Standard and extended battery</li> </ul> |  <ul style="list-style-type: none"> <li>• Choice of windows embedded or Android™ operating systems</li> <li>• Full-shift hot swappable battery</li> <li>• Choice of 1D or 2D imagers featuring Datalogic's patented 'Green Spot', plus new 2D Auto Range option</li> </ul> |  <ul style="list-style-type: none"> <li>• Wireless charging eliminates all contacts on the device and cradle</li> <li>• Dual band Wi-Fi including the latest 802.11ac standard and 802.11r/k for fast roaming</li> <li>• Full suite of cellular connectivity for voice and data, featuring LTE-Advanced/4G+</li> </ul> |
| <b>Operating System</b>                            | Windows Embedded Compact 7 / Android v4.4   |  | Google Android 8.1 (Oreo) with Google Mobile Services (GMS)   |
| <b>CPU, Processor</b>                              | TI OMAP4 @ 1 GHz  |  | 2 GHz Octa-core   |
| <b>Memory: RAM / ROM</b>                           | RAM: 1 GB;<br>Flash: 8 GB   |  | RAM: 3 GB;<br>Flash: 32 GB  |
| <b>Display</b>                                     | Transflective TFT / LCD,<br>QVGA 240 x 320 px;<br>3.2 in diagonal   | Transflective TFT / LCD,<br>QVGA 240 x 320 px;<br>3.5 in diagonal  | 5.0 in IPS;<br>720 x 1280 px HD resolution  |
| <b>1D/Linear Codes/2D Codes/<br/>2D Imager</b>     | YES   | YES, including new Near/Far Auto Range capability  | YES   |
| <b>Wireless Charging</b>                           | ---   |  | YES   |
| <b>Local Wireless Radio<br/>(Wi-Fi, Bluetooth)</b> | TI Wi-Link 8, IEEE 802.11 a/b/g/n;<br>Bluetooth® v4 / BLE (Android models);<br>Bluetooth® v2.1 + EDR (WEC7 models); MIMO  |  | Bluetooth® v4.2 (Classic Bluetooth wireless technology and BLE)   |
| <b>Wireless Wide Area Network<br/>(WWAN)</b>       | ---   |  | LTE-Advanced/4G+; Cat 6   |
| <b>Wired Communications</b>                        | RS-232; USB; Ethernet   |  | USB 2.0 Client  |
| <b>Keypad / Keyboard Options</b>                   | 50-key full alphanumeric,<br>38-key functional;<br>28-key numeric keyboard  | 29-Key (also in functional version); 52-Key  | 3 programmable keys   |
| <b>Camera</b>                                      | ---   |  | 13 MP color   |
| <b>Voice Capability</b>                            |   |  | VoiP  |
| <b>IP Rating</b>                                   | IP64  | IP65   |   |
| <b>Drop to Concrete</b>                            | 1.8 m / 6.0 ft  |  | 1.5m / 5ft  |
| <b>Operating Temperature</b>                       | -10 to 50 °C [14 to 122 °F]   | -20 to 50 °C [-4 to 122 °F]  |   |
| <b>Weight</b>                                      | Hand held (w/stan. battery):<br>388 g / 13.7 oz<br>Pistol grip (w/stan. battery):<br>482 g / 17.0 oz  | Hand held: 602.0 g / 21.4 oz<br>Pistol grip: 668.0 g / 23.6 oz   | 285.0 g / 10.0 oz   |






# MOBILE COMPUTERS

|  | MEMOR™ 20   | RHINO II™ and SH15/SH21  | TASKBOOK   |
|--|---|--|--|
|  |  <ul style="list-style-type: none"> <li>Stunning 5.7" Full HD display in 18:9 ratio with Gorilla™ hardened glass</li> <li>Superior Qualcomm Snapdragon SD660 Octa-core platform clocked at 2.2 GHz for top performance with Android™ 9 (Pie), GMS and AER</li> <li>Most rugged PDA with an IP65 and IP67 sealing rating and 1.8 m / 6.0 ft repeated drops</li> </ul> |  <ul style="list-style-type: none"> <li>10 , 12, 15, 21 inch high resolution color display</li> <li>Operating System: WEC7, Windows 7 Emb, Windows 10 IoT or Android 7.1</li> <li>Capacitive multi-touch screen with gloves support or resistive touch screen for cold/freezer environments</li> </ul> |  <ul style="list-style-type: none"> <li>7 inch e 10 inch with Corning Gorilla Glass</li> <li>Operating System: Windows 10 IoT</li> <li>Dock Station with AC or DC power supply and handgrip available*</li> </ul> |
| <b>Operating System</b>                        | Android v9.0 (Pie) GMS  | WEC7, Windows Embedded Standard 7, Windows 10 IoT Enterprise 64 bit, Android 7.1   | Windows® 10 IoT Enterprise 64-bit  |
| <b>CPU, Processor</b>                          | Qualcomm SD660 Octa-core 2.2 GHz  | Proc. ARM 4 x 1.0 GHz;<br>Proc. Intel E3826 2 x 1.46 GHz<br>Intel Atom E3845 Quad Core 1.91 GHz<br>Intel i5-5350U Dual Core 1.8 GHz  | Intel E3826 2 x 1.46GHz  |
| <b>Memory: RAM / ROM</b>                       | System RAM: 4 GB;<br>eMMC Flash: 64 GB  | RAM: 1/2 Gb (Arm), 4 GB (Intel) 16 GB (i5)<br>Storage: 32 GB CFAST/SD Card   | RAM: 4 GB  |
| <b>Display</b>                                 | 5.7" Full HD display in 18:9 ratio with Gorilla™ hardened glass<br>Second display on top for enriched Android notifications: 0.7 inch POLED   | <u>Rhino II</u> : 10.4 inch XGA 1024 x 768, 350 NITS<br>12.1 inch XGA, 1024 x 768, 500 NITS<br><u>SH15</u> : XGA 1024 x 768, 400 NITS<br><u>SH21</u> : FHD 1920 x 1080, 350 NITS   | 7 in: WSVGA 1024 x 600, 420 cd/m²<br>10 in: WXGA 1280 x 800, 350 cd/m²   |
| <b>1D/Linear Codes/2D Codes/2D Imager</b>      | YES   | ---  | ---  |
| <b>Wireless Charging</b>                       | WPC Qi EPP compliant; 15W fast charging   | ---  | ---  |
| <b>Local Wireless Radio (Wi-Fi, Bluetooth)</b> | Bluetooth wireless technology v5.0 (Classic Bluetooth wireless technology and BLE)  | Wi-Fi 802.11 a/b/g/n (2.4 & 5 GHz);<br>Cisco CCX v4; Bluetooth® v4.0   | Wi-Fi 802.11 a/b/g/n/ac/r;<br>Bluetooth® v4.0  |
| <b>Wireless Wide Area Network (WWAN)</b>       | LTE-Advanced / 4G+; CAT 9; Dual Nano SIM<br>• EMEA and ROW Configuration: GSM: Quad band; WCDMA: B1/2/5/8; FDD_LTE: B1/3/5/7/8/20/28<br>• North America Configuration (AT&T and Verizon certified): GSM: Quad band; WCDMA: B1/2/4/5/8; FDD_LTE: B1/2/4/5/7/12/13/17/25/26/30; VoLTE enabled   | ---  | ---  |
| <b>Wired Communications</b>                    | USB-C: High Speed USB 3.1 gen1 Host and Client; Gigabit Ethernet connectivity (via 3-slot dock)   | Ethernet; USB; RS-232 (5 and 12 V)   | On the device: USB-C<br>On the docking station: Ethernet; USB; RS-232  |
| <b>Keypad / Keyboard Options</b>               | Physical Keys: 2 side scan keys; Power On/Off; Volume Up/ Down; 3 Android soft keys; Fingerprint sensor   | 4 programmable keys; Customizable Software Keyboards   | 1 programmable key; Customizable Software Keyboards  |
| <b>Camera</b>                                  | Rear Camera: Resolution: 13 megapixel; Illumination: User controllable LED flash; Lens: Auto focus<br>Front Camera: Resolution: 8 megapixel; Fixed focus  | ---  | 5 MP color rear camera   |
| <b>Voice Capability</b>                        | Advanced cellular connectivity for voice and data, featuring LTE and Dual SIM   | ---  | ---  |
| <b>IP Rating</b>                               | IP65 and IP67   |  | IP65   |
| <b>Drop to Concrete</b>                        | 1.8 m / 6.0 ft  | ---  | 1.2 m / 4.0 ft   |
| <b>Operating Temperature</b>                   | Operating: -20 to 50 °C / -4 to 122 °F  | Standard Model: -20 to 50 °C [-4 to 122 °F]<br>Freezer Model: -30 to 50 °C [-22 to 122 °F]   | -20 to 55 °C [-4 to 131 °F]  |
| <b>Weight</b>                                  | With Battery: 295 g / 10.4 oz   | <u>Rhino II</u> : 10 in Standard Model: 3.6 Kg / 7.9 lb<br>12 in Standard Model: 4.7 Kg / 10.4 lb<br><u>SH15</u> : 6.5 Kg / 14.3 lbs<br><u>SH21</u> : 10.8 Kg / 23.8 lbs   | 7 in 733 g / 25.8 oz<br>10 in 1044 g / 36.8 oz   |

## Notes




\* Mobile handgrip with optional hot swappable battery and Standard or Auto Range 2D Imager; Standard range up to 1.1 m / 43 inches; Auto Range up to 15 m / 50 ft

# SENSORS

|  | S67-Y  | S3Z   | S5N IO-Link   |
|--|--|---|---|
|  |  <ul style="list-style-type: none"> <li>Resolution of 10um@50mm distance on white 90% remission</li> <li>Response time less than 0,9ms</li> <li>Linearity error of +/-0,03mm@50mm range</li> <li>Robust light interference suppression</li> </ul> |  <ul style="list-style-type: none"> <li>50-250 mm background suppression</li> <li>0.7 m proximity, 150 mm with narrow beam / 4 m polarized retroreflective / 15 m through beam</li> <li>Light and dark trimmer models</li> </ul> |  <ul style="list-style-type: none"> <li>All the basic optic functions available</li> <li>M18 flat plastic with universal mounting or available in M18 metal housing</li> <li>Axial or radial optics, cable or connector</li> </ul> |
| <b>Power supply</b>                          | 12 – 28 Vdc +/- 10%  | 15 – 30 Vdc (limit values)  | 10 – 30 Vdc (limit values)  |
| <b>Consumption (output current excluded)</b> | 100 mA   | 30 mA max. (LED mod.)<br>35 mA max. (Laser mod.)  | 35 mA max. (mod. S5N...B01/C01/C21/E01/T01)<br>30 mA max. (mod. S5N...F01)  |
| <b>Light emission</b>                        | 650 nm Pulsed RED Laser Diode<br>CLASS 2 According to IEC 60825-1 (2014)<br>Complies with 21 CFR 1040.10 and 1040.11   | red LED 650 nm (mod. S3Z...T51)<br>red LED 665 nm (mod. S3Z...B01/C01)<br>red LED 670 nm (mod. S3Z...M01)<br>IR LED 850 nm (mod. S3Z...C11)<br>IR LED 870 nm (mod. S3Z...F01/G00)<br>red Laser 650 nm (mod. S3Z...B01/F01/G00/M01)  | red LED 630 nm (mod. S5N...E01)<br>red LED 660 nm (mod. S5N...B01/T01)<br>IR LED 880 nm (mod. S5N...C01/C21/G00)  |
| <b>Setting</b>                               | Push Button Teach in   | sensitivity trimmer, 6 turns screw (mod. S3Z...M01),<br>LIGHT/DARK trimmer model available (mod.S3Z...-PP, -NN)   | sensitivity trimmer (mod. B01/C01/C21/E01/F01/T01)  |
| <b>Operating mode</b>                        | No Adjustment  | LIGHT/DARK trimmer (Laser mod. S3Z...-PP, -NN),<br>LIGHT (mod. S3Z...-PL, -NL),<br>DARK (mod. S3Z...-PD, -ND)   | LIGHT mode on N.O. output / DARK mode on N.C. output (mod.S5N...C01/C21)<br>DARK mode on N.O. output / LIGHT mode on N.C. output (mod.S5N...B01/E01/F01/T01)  |
| <b>Indicators</b>                            | Red LED Alarm/Soiled lens indicator<br>Green LED Power indicator<br>Push Button Teach in   | yellow OUTPUT LED, green STABILITY LED (mod. S3Z...B01/C01/C11/F01),<br>POWER ON LED (mod. S3Z...G00)   | yellow OUTPUT LED<br>green STABILITY LED (mod. S5N...B01/C01/C21/E01/F01), POWER ON LED (mod. S5N...G00)  |
| <b>Output</b>                                | Current Analog Output 4 to 20mA<br>Voltage Analog Output 0 to 10V  | PNP or NPN (short circuit protection)   | PNP or NPN; NO; NC (mod. S5N)   |
| <b>Output current</b>                        | @10kOhm  | 100 mA max.   |   |
| <b>Response time</b>                         | < 900 µs long range  | 1 ms max. (LED mod.)<br>250 µs max. (Laser mod.)  | 0,5 ms (mod. S5N...B01/T01/C21/C01/E01)<br>2 ms (mod. S5N...F01/G00)  |
| <b>Switching frequency</b>                   | 1 kHz  | 500 Hz max. (LED mod.)<br>2 kHz max. (Laser mod.)   | 1 kHz (mod. S5N...B01/T01/C21/C01/E01)<br>250 Hz (mod. S5N...F01/G00)   |
| <b>Connection</b>                            | Rotatable M12 5poles   | 2 m cable Ø 3,5 mm, M8 4-pole connector   | 2 m cable Ø 4 mm, M12 4-pole connector  |
| <b>IP rating</b>                             | IP67   |   |   |
| <b>Housing material</b>                      | die-cast zinc  | body PBT, indicators cover PC   | Plastic version PBT<br>Metal version nickel plated brass  |
| <b>Lens material</b>                         | Glass  | PMMA, PC (mod. S3Z...B01)   | PMMA  |
| <b>Operating temperature</b>                 | 0 to 50°C [32 to 122 °F]   | -25 to 55 °C (LED mod.), -10 to 55 °C (Laser mod.)  | -25 to 55 °C  |
| <b>Storage temperature</b>                   | -25 to 70 °C [-13 to 158 °F]   | -40 to 70 °C (LED mod.), [-40 to 158 °F]<br>-25 to 70 °C [-13 to 158 °F] (Laser mod.)   | -25 to 70 °C [-13 to 158 °F]  |
| <b>Weight</b>                                | 180 g max  | 50 g max cable vers. ,<br>10 g max conn. vers.  | Plastic version 75 g max cable vers.,<br>25 g max conn. vers.<br>Metal version 110 g max cable vers.,<br>60 g max conn. vers.   |



# SENSORS

|  | LD46  | S85  | S8  |
|--|---|--|---|
|  |    |   |    |
|  | <ul style="list-style-type: none"> <li>High sensitivity on fluorescent marks</li> <li>10 - 50 mm [0.39 - 1.9 in] detection distance</li> <li>2 kHz switching frequency</li> </ul> | <ul style="list-style-type: none"> <li>TOF technology class2 red laser</li> <li>Measuring range up to 10m or 20m [32.8 - 65.6 in]</li> <li>1 mm resolution, 7 mm [0.02 in] accuracy, 1 mm repeatability</li> </ul>   | <ul style="list-style-type: none"> <li>Compact dimensions (14x42x25 mm) [0.04x0.13x0.08 in]</li> <li>Background suppression for transparent and shiny objects</li> <li>Extremely focused spot, under 1 mm (LASER models)</li> </ul>                   |
| <b>Power supply</b>                          | 15 ... 30 Vdc (limit values)  | 24 Vdc $\pm$ 20%   | 12 ... 30 Vdc (short-circuit protection)  |
| <b>Consumption (output current excluded)</b> | 50 mA max. at 24 Vdc  | 2,8 W max. (mod. S85...Y03)<br>3 W max. (mod. S85...Y13)   | 30 mA; 35 mA (mod. S8...M01);<br>20 mA (mod. S8...F), 15 mA (mod. S8...G) max.  |
| <b>Light emission</b>                        | UV LED 375 nm   | red Laser 658 nm   | red LED 660 nm (mod. S8...B/C/M/G/T)<br>RGB LEDs: blue 465 nm, green 520 nm, red 630nm with automatic selection (mod. S8...W)<br>UV LED 375 nm (mod. S8...U)<br>red Laser 645..665 nm (mod. S8...B/M)   |
| <b>Setting</b>                               | SET push-buttons  | push-buttons (mod. S85...Y03)<br>push-buttons and display (mod. S85...Y13)   | 8-turn distance adjustment trimmer (mod. S8...M53/M)<br>LIGHT / DARK mono-turn trimmer (mod. S8...B/C/F/T51)<br>teach-in push button (mod. S8...M53/W03/W13/T53/U)<br>remote input (mod. S8...W/U/T50/T53)  |
| <b>Operating distance</b>                    | 10 ... 20 mm [0.03 - 0.06 in] (LD46-UL-715)<br>20 ... 40 mm [0.06 - 0.13 in] (LD46-UL-755)<br>30 ... 50 mm [0.09 - 0.16 in] (LD46-UL-735)   | 90% white target 0,2...10 m / 0.6...32.8 ft (mod. S85...Y03), 0,2...20 m / 0.6...65.6 ft (mod. S85...Y13)<br>18% grey target 0,2...5 m / 0.6...16.4 ft (mod. S85...Y03), 0,2...8 m / 0.6...26.2 ft (mod. S85...Y13)<br>6% black target 0,2...3 m / 0.6...9.8 ft (mod. S85...Y03), 0,2...5 m / 0.6...16.4 ft (mod. S85...Y13) | mono-turn trimmer (mod. S8...B/C/F/M/T/U/W13)<br>automatic (mod. S8...W/T50)<br>remote input (mod. S8...M53)  |
| <b>Indicators</b>                            | yellow OUTPUT LED<br>green READY LED<br>orange DELAY LED and KEYLOCK LED<br>5-segment bargraph  | yellow Q1 LED, Q2 LED<br>green/red POWER/OUT OF RANGE LED<br>5-digit multi display (mod. S85...Y13)  | yellow OUTPUT LED (excl. mod. S8...G), OUTPUT/ALARM LED (mod. S8...M53/M/C)<br>green POWER ON LED   |
| <b>Output</b>                                | PNP/NPN; analog output  | push pull/Q (mod. S85...Y03)<br>PNP, NPN, push pull, Q, Qneg (mod. S85...Y13)  | PNP or NPN N.O.   |
| <b>Output current</b>                        | 100 mA max  | 100 mA   | 100 mA (overload protection)  |
| <b>Response time</b>                         | 250 $\mu$ s   | slow 45 ms (mod. S85...Y13)<br>medium 30 ms<br>fast 15 ms (mod. S85...13)  | 1 ms (mod. S8...M53/M)<br>500 $\mu$ s (mod. S8...B/F/C)<br>250 $\mu$ s (mod. S8...T)<br>100 $\mu$ s (Laser vers. mod. S8...M)<br>50 $\mu$ s (mod. S8...W00/W03 e Laser mod. S8...B)<br>20 $\mu$ s (mod. S8...W13)<br>250 $\mu$ s...1 ms (mod. S8...U) |
| <b>Switching frequency</b>                   | 2 kHz   | slow 22Hz (mod. S85...Y13)<br>medium 30Hz<br>fast 66Hz (mod. S85...13)   | 500 Hz (mod. S8...M53/M)<br>1 kHz (mod. S8...B/F/C)<br>2 kHz (mod. S8...T)<br>5 kHz (Laser vers. mod. S8...M)<br>10 kHz (mod. S8...W00/W03 e Laser mod. S8...B)<br>25 kHz (mod. S8...W13)<br>500 Hz...2 kHz (mod. S8...U)                             |
| <b>Connection</b>                            | M12 5-pole connector  | M12 5-pole connector (mod. S85...Y03),<br>M12 8-pole connector (mod. S85...Y13)  | M8 4-pole connector, 150 mm [0.4 in] length $\varnothing$ 4 mm [0.01 in] cable with M12 4-pole connector (pig-tail vers.)   |
| <b>IP rating</b>                             | IP67  |  | IP67, IP69K (mod. S8-M)   |
| <b>Housing material</b>                      | aluminium   | ZINC ALLOY ZAMA 13 EN-1774/PC LEXAN 121R display   | ABS, Stainless Steel AISI346L   |
| <b>Lens material</b>                         | glass   | PMMA   | window in PMMA; lens in PC  |
| <b>Operating temperature</b>                 | -10 to 55 °C [14 to 131 °F]   | -15 to 50 °C [5 to 122 °F]   | -10 to 55 °C [14 to 131 °F]   |
| <b>Storage temperature</b>                   | -25 to 70 °C [-13 to 158 °F]  |  | -20 to 70 °C [-4 to 158 °F]   |
| <b>Weight</b>                                | 180 g / 6.34 oz max   | 250 g / 8.81 oz max  | 12 g / 0.42 oz max conn. vers., 50 g / 1.76 oz max pig-tail vers., 70 g / 2.46 oz max (mod. S8-M)   |

# DATALOGIC PROFESSIONAL SERVICES

## DATALOGIC PROFESSIONAL SERVICE PROGRAMS THAT MEET YOUR EVERY NEED

Whatever your service need, Datalogic can help. Our technicians average over 13 years of experience spanning multiple device generations—and their knowledge stays fresh through continuous training. Explore all of our Service offerings with your Datalogic Authorized Reseller to find the programs that best meet your needs and keep your Datalogic solution working at peak efficiency throughout its lifecycle.



### **Personalized solutions and installations:** **EASEOFBUILD program**

We work with you to design installations that fit your workflow and timing. Datalogic-trained technicians carefully install, configure and commission your solution to ensure optimum performance, backed up by a component onsite warranty covering any startup issues.



### **Continued training:** **EASEOFTRAIN program**

Our customizable training programs help your operators and onsite IT and maintenance staff get the most out of your Datalogic solutions. We offer a range of training opportunities at our facilities, at regional training events, or online.



### **Preventative Maintenance:** **EASEOFPM program**

Keep your equipment in top operating condition with onsite preventative maintenance. PM service not only increases equipment life but ensures peak efficiency and lowest cost.



### **Technical support:** **EASEOFSUPPORT program**

Get help fast with our 24/7, “follow-the-sun” phone support programs. Datalogic can tailor service-level agreements to your specific needs with worldwide coverage, and add-ons including technician dispatch should an issue require on-site assistance.



### **Extended service:** **EASEOFCARE program**

Your business is not one-size-fits-all, and neither are our equipment service plans. EASEOFCARE extended repair is flexible, customizable and responsive. Four convenient subscriptions that cover needs from overnight replacement to five-day repair.



### **Customized application management:** **EASEOFDEV program**

Make your Datalogic solution work its hardest with our custom integration and development services. Experienced engineers customize your solution, integrating components from different vendors to meet your specific needs, so your solution performs exactly the way you envision.

## NOTES



## NOTES

## NOTES



Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

*\*Subzero models are not available for offer, sale or distribution in Germany.*

SG-Automotive-ENA4  
Revision B 20190912

[www.datalogic.com](http://www.datalogic.com)